

---

**24-Bit, 3-Channel, 2KSPS, Low Noise, Low Power  $\Sigma\Delta$ ADC**

---

**Features**

- 2.5V to 3.6V operation voltage range
- Up to 21 bits ENOB
- RMS noise
  - 784nV RMS noise @ 250Hz, PGA = x1
  - 74nV RMS noise @ 250Hz, PGA = x128
- 300 $\mu$ A ultra-low current consumption
- 6 $\mu$ A (typ.) standby-mode current
- Input Channels
  - Three fully differential signal input channels
  - Two fully differential reference input channels
- Embedded temperatures sensor
- Built-in power supply monitor
- Sensors burn-out diagnostic
- Internal precision clock oscillator
- 2-stages programmable signal gain amplifier
  - x1 ~ x128 1<sup>st</sup> stage gain
  - x1 ~ x16 2<sup>nd</sup> stage gain
- 2 programmable IDAC current sources
- -40 ~ 85°C operation temperature
- 250Hz to 2KHz output data rates
- QFN16-3x3 package
- A build-in moving-average digital filter

**Applications**

- Instrumentation
- Direct RTD, thermistor measurements
- IR thermopile sensor measurements
- Gas detectors
- Pressure sensor acquisition
- Wheatstone bridge sensor measurement
- Liquid chromatography
- PH sensor analysis
- Smart Home sensor analog front-end

**Description**

The AFE6160A is a 3-channel, low-noise and ultra-low power 24-bit Sigma-Delta Analog-to-Digital Converter (SDADC) with an integrated decimation filter. The device supports output data rates of 250Hz, 500Hz, 1kHz or 2kHz and communicates with a host MCU through standard I<sup>2</sup>C interface.

The AFE6160A provides three independent differential signal input channels and two independent reference input channels. Two precision current sources (IDACx) and one voltage source (AVDD) are available for direct sensor excitation.

The device incorporates two-stage Programmable Gain Amplifiers (PGA) for signal inputs and one programmable gain amplifier for reference inputs. The 1<sup>st</sup> stage signal amplifier, PGAGN, offers gain setting from x1 to x128, while the 2<sup>nd</sup> stage signal amplifier, ADCGN, supports gain setting from x1 to x16. The reference amplifier, REFGN, provides gain attenuation from x1 to x0.25.

Embedding with well-calibrated temperature sensor and a precision 1.024MHz internal oscillator, the AFE6160A is a cost-effective solution for the applications of high precision measurement.

**Pin Function Description**

| Pin Name     | Pin No. | I/O | Description                                    |
|--------------|---------|-----|------------------------------------------------|
| VCM          | 1       | I/O | Common-mode voltage regulation                 |
| AVSS         | 2       | P   | Analog ground                                  |
| AVDD         | 3       | I/O | Analog power                                   |
| VSS          | 4       | P   | Digital ground                                 |
| SDA          | 5       | I/O | I <sup>2</sup> C digital interface data I/O    |
| EOC          | 6       | O   | Interrupt I/O for end of data conversion       |
| SCL          | 7       | I   | I <sup>2</sup> C digital interface clock input |
| VDD          | 8       | P   | Digital power                                  |
| AIN0+, AIN0- | 9,10    | I   | CH0 differential analog signal input           |
| AIN1+, AIN1- | 11,12   | I   | CH1 differential analog signal input           |
| AIN2+, AIN2- | 13,14   | I   | CH2 differential analog signal input           |
| RIN1+, RIN1- |         | I   | CH1 differential reference voltage input       |
| RIN0+, RIN0- | 15,16   | I   | CH0 differential reference voltage input       |

**Pin Configuration and Functions**

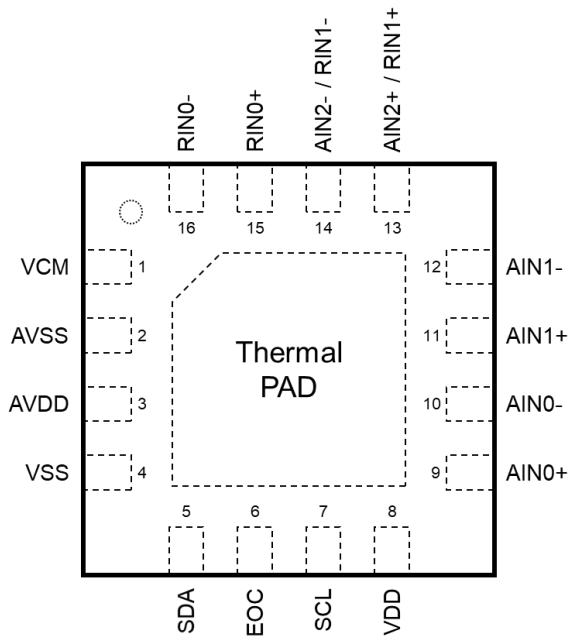


Figure 1 Top view of AFE6160A

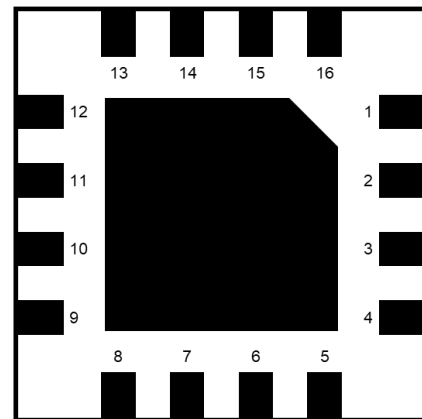


Figure 2 Bottom view of AFE6160A

**Ordering Information**

| Product ID       | Package Type | Packing         | Comments |
|------------------|--------------|-----------------|----------|
| AFE6160A-NQ16NNR | QFN16-3x3    | 5000 Units/Reel | Green    |

**Marking Information**

ESMT  
 Line 1: Production Name  
 Line 2: Date Code



**Functional Block Diagram**

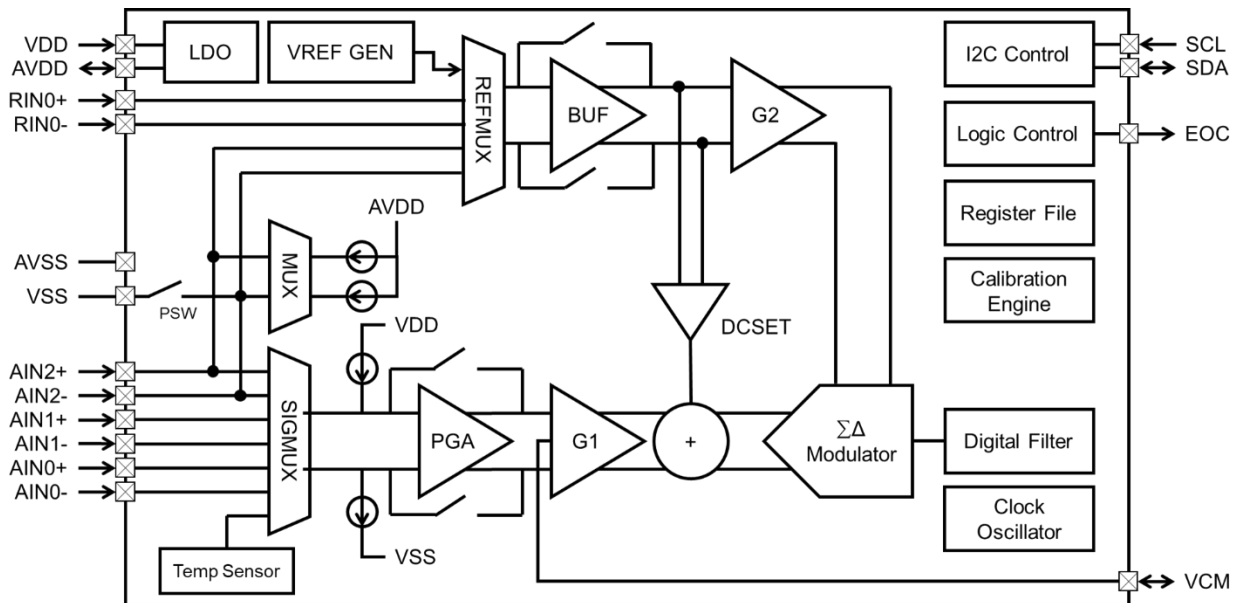


Figure 3 Function block diagram of AFE6160A

## Table of Contents

|                                                              |           |                                                     |           |
|--------------------------------------------------------------|-----------|-----------------------------------------------------|-----------|
| <b>Features</b> .....                                        | 1         | Power Supplies and Monitor .....                    | 20        |
| <b>Applications</b> .....                                    | 1         | Reset .....                                         | 20        |
| <b>Description</b> .....                                     | 1         | Digital Communication Interface .....               | 20        |
| <b>Pin Function Description</b> .....                        | 2         | Signal and Reference Multiplexer .....              | 22        |
| <b>Pin Configuration and Functions</b> .....                 | 2         | Signal Amplification and DC Offset Adjustment ..... | 23        |
| <b>Ordering Information</b> .....                            | 3         | Clock Oscillator .....                              | 25        |
| Marking Information .....                                    | 3         | ADC Conversion .....                                | 25        |
| <b>Functional Block Diagram</b> .....                        | 3         | Operation Mode .....                                | 27        |
| <b>Table of Contents</b> .....                               | 4         | IDAC Excitation Current Sources .....               | 28        |
| <b>Specifications</b> .....                                  | 5         | Sensor Diagnostic .....                             | 28        |
| Absolute Maximum Rating .....                                | 5         | Local Temperature Sensor .....                      | 28        |
| Recommended Operating Condition .....                        | 6         | On-Chip Sensor Switch .....                         | 29        |
| Electrical Characteristics .....                             | 7         | <b>Layout Note and Grounding Guidelines</b> .....   | <b>30</b> |
| I <sup>2</sup> C Digital Communication Timing Diagrams ..... | 10        | <b>Application Information</b> .....                | <b>31</b> |
| Performance Characteristics .....                            | 11        | <b>Register Summary</b> .....                       | <b>32</b> |
| <b>Multiplexer Connection Network</b> .....                  | <b>13</b> | Register Description .....                          | 33        |
| <b>Noise and Resolution</b> .....                            | <b>14</b> | <b>Package Outline Dimensions</b> .....             | <b>42</b> |
| <b>System Description</b> .....                              | <b>19</b> | <b>Reversion History</b> .....                      | <b>43</b> |
| Overview .....                                               | 19        | <b>Important Notice</b> .....                       | <b>44</b> |

## Specifications

### Absolute Maximum Rating

Stresses beyond those listed under absolute maximum ratings may cause permanent damage to the device.

| Symbol           | Description                 | Conditions                                      | Min   | Max | Unit |
|------------------|-----------------------------|-------------------------------------------------|-------|-----|------|
| VDD              | Supply Voltage              | VDD                                             | -0.3  | 4.0 | V    |
| AVDD             | Analog Voltage              | AVDD                                            | -0.3  | 4.0 | V    |
| V <sub>IN</sub>  | Input Pin Voltage           | AINx+, AINx-, RINx+, RINx-, VCM                 | -0.3  | 4.0 | V    |
| V <sub>IO</sub>  | Digital I/O ports           | EOC, SDA, SCL                                   | -0.3  | 4.0 | V    |
| T <sub>A</sub>   | Operation Temperature Range |                                                 | -40   | 85  | °C   |
| T <sub>stg</sub> | Storage Temperature Range   |                                                 | -55   | 150 | °C   |
| ESD              | Human Body Mode             | AINx+, AINx-, RINx+, RINx-, SDA, SCL, EOC, AVDD | ±2000 |     | V    |
|                  |                             | VCM                                             | ±1000 |     | V    |
|                  | Charged Device Model        | ±500                                            |       | V   |      |

- (1) Operation Stresses beyond the Absolute Maximum Ratings may cause permanent damage. Operation within the Absolute Maximum Ratings but outside the Recommended Operating Conditions may result in degraded functionality, reduced performance, reliability issues, or shortened device lifetime.
- (2) All voltage values are with respect to network ground terminal.
- (3) Power dissipation and thermal limits must be observed

**Recommended Operating Condition**

| Symbol                        | Description                    | Conditions                        | Min               | Typ                       | Max               | Unit |
|-------------------------------|--------------------------------|-----------------------------------|-------------------|---------------------------|-------------------|------|
| <b>POWER SUPPLY</b>           |                                |                                   |                   |                           |                   |      |
| VDD                           | System power supply            | VDD to VSS                        | 2.5               | 3.3                       | 3.6               | V    |
| AVDD                          | Analog power suppl (*1)        | AVDD to AVSS                      | AVDD              | 2.8                       | 3.6               | V    |
| VCM                           | Common mode voltage (*1)       | VCM to AVSS                       | 0.6               | $(AVDD-0.3) / 2$<br>(±5%) | AVDD - 1.0        | V    |
| <b>ANALOG INPUTS</b>          |                                |                                   |                   |                           |                   |      |
| V <sub>AiNx</sub>             | Absolute input voltage         | INBUF = 1                         | AVSS              | —                         | AVDD - 0.6        | V    |
|                               |                                | INBUF = 0                         | AVSS              | —                         | AVDD              | V    |
| V <sub>IN</sub>               | Differential input voltage     | $V_{IN} = V_{AINx+} - V_{AINx-}$  | —                 | $\pm V_{REF}/Gain$        | —                 | V    |
| <b>REFERENCE INPUTS</b>       |                                |                                   |                   |                           |                   |      |
| V <sub>REF</sub>              | Differential reference voltage | $V_{REF} = V_{RINx+} - V_{RINx-}$ | 0.3               | —                         | AVDD - AVSS       | V    |
| V <sub>RINx+</sub>            | Positive reference voltage     | VRBUF = 0                         | $V_{RINx-} + 0.3$ | —                         | AVDD              | V    |
|                               |                                | VRBUF = 1                         | $V_{RINx-} + 0.3$ | —                         | AVDD - 0.6        |      |
| V <sub>RINx-</sub>            | Negative reference voltage     |                                   | AVSS              | —                         | $V_{RINx+} - 0.3$ | V    |
| <b>DIGITAL INPUTS/OUTPUTS</b> |                                |                                   |                   |                           |                   |      |
| IO                            | GPIO ports                     | SDA, SCL, EOC                     | VSS               | —                         | VDD               | V    |
| <b>OPERATION TEMPERATURE</b>  |                                |                                   |                   |                           |                   |      |
| T <sub>A</sub>                | Operating ambient temperature  |                                   | -40               | —                         | 85                | °C   |

(\*1) The typical value of AVDD and VCM is generated by AFE6160A internally. The minimum and maximum value are the recommended operation range when an external voltage is supplied on those two voltages (Figure 19).

## Electrical Characteristics

All specifications are at  $T_a = 25^\circ\text{C}$ ,  $V_{DD} = 3.3\text{V}$ , internal  $AV_{DD}$  and  $V_{CM}$ ,  $V_{SS} = AV_{SS} = 0\text{V}$ , PGA, PGA chopper and ADC chopper are enabled,  $PGAGN = ADCGN = REFGN = x1$ , reference buffer is enabled (unless otherwise noticed).

| Symbol                             | Description                          | Conditions             | Min  | Typ   | Max  | Unit   |
|------------------------------------|--------------------------------------|------------------------|------|-------|------|--------|
| <b>POWER SUPPLY</b>                |                                      |                        |      |       |      |        |
| VDD                                | System power supply                  | VDD to VSS             | 2.5  | 3.3   | 3.6  | V      |
| I <sub>Q</sub>                     | Quiescent current                    | INBUF = 0              | —    | 300   | 350  | μA     |
|                                    |                                      |                        | —    | 350   | 400  | μA     |
|                                    |                                      | Stand-by Mode          | —    | 6     | 9    | μA     |
| <b>PGA</b>                         |                                      |                        |      |       |      |        |
| PGAGN                              | PGA Gain Ratio                       | PGAGN [2:0] = 000      | —    | 1     | —    | V/V    |
|                                    |                                      | PGAGN [2:0] = 001      | —    | 2     | —    | V/V    |
|                                    |                                      | PGAGN [2:0] = 010      | —    | 4     | —    | V/V    |
|                                    |                                      | PGAGN [2:0] = 011      | —    | 8     | —    | V/V    |
|                                    |                                      | PGAGN [2:0] = 100      | —    | 16    | —    | V/V    |
|                                    |                                      | PGAGN [2:0] = 101      | —    | 32    | —    | V/V    |
|                                    |                                      | PGAGN [2:0] = 110      | —    | 64    | —    | V/V    |
|                                    |                                      | PGAGN [2:0] = 111      | —    | 128   | —    | V/V    |
|                                    | RFI filter 3dB frequency             | Design guaranteed      | —    | 12.8  | —    | MHz    |
| V <sub>CM</sub> <sub>PGA</sub>     | Input common-mode voltage            | PGAGN [2:0] ≠ 000      | 0.3  | —     | —    | V      |
| PGAGN <sub>TC</sub>                | Temperature drift of PGAGN           | PGAGN [2:0] = 001      | —    | -100  | —    | ppm/°C |
|                                    |                                      | PGAGN [2:0] = 111      | —    | -400  | —    |        |
| <b>Sigma-Delta ADC PERFORMANCE</b> |                                      |                        |      |       |      |        |
| ENOB                               | Effective Resolution                 | VRBUF = 0              | —    | 21    | —    | LSB    |
| ODR                                | Output data rate                     | OSR [1:0] = 00         | —    | 500   | —    | SPS    |
|                                    |                                      | OSR [1:0] = 01         | —    | 1000  | —    |        |
|                                    |                                      | OSR [1:0] = 10         | —    | 2000  | —    |        |
|                                    |                                      | OSR [1:0] = 11         | —    | 250   | —    |        |
| V <sub>OS</sub>                    | Offset voltage                       |                        | —    | 10    | —    | LSB    |
| V <sub>OS,TC</sub>                 | Temperature drift of V <sub>OS</sub> |                        | —    | -10   | —    | LSB/°C |
| GE                                 | Gain error                           | ±0.8FSR                | -1.0 | ±0.25 | +1.0 | %      |
| INL                                | Integral non-linearity               |                        | —    | ±30   | —    | ppm    |
| CMRR                               | common-mode rejection ratio          | ODR=500SPS@60Hz        | —    | 80    | —    | dB     |
| PSRR                               | power-supply rejection ratio         | VDD to VSS             | —    | 90    | —    | dB     |
| R <sub>PSW</sub>                   | Sensor switch                        | I <sub>PSW</sub> = 1mA | 7    | 10    | 13   | Ω      |
| ADCGN                              | ADC Gain Ratio                       | ADCGN [3:0] = 0000     | —    | 1     | —    | V/V    |
|                                    |                                      | ADCGN [3:0] = 0001     | —    | 2     | —    | V/V    |
|                                    |                                      | ADCGN [3:0] = 0010     | —    | 3     | —    | V/V    |
|                                    |                                      | ADCGN [3:0] = 0011     | —    | 4     | —    | V/V    |

|                              |                                |                                                            |                         |                         |                          |        |
|------------------------------|--------------------------------|------------------------------------------------------------|-------------------------|-------------------------|--------------------------|--------|
|                              |                                | ADCGN [3:0] = 0100                                         | —                       | 5                       | —                        | V/V    |
|                              |                                | ADCGN [3:0] = 0101                                         | —                       | 6                       | —                        | V/V    |
|                              |                                | ADCGN [3:0] = 0110                                         | —                       | 7                       | —                        | V/V    |
|                              |                                | ADCGN [3:0] = 0111                                         | —                       | 8                       | —                        | V/V    |
|                              |                                | ADCGN [3:0] = 1000                                         | —                       | 9                       | —                        | V/V    |
|                              |                                | ADCGN [3:0] = 1001                                         | —                       | 10                      | —                        | V/V    |
|                              |                                | ADCGN [3:0] = 1010                                         | —                       | 11                      | —                        | V/V    |
|                              |                                | ADCGN [3:0] = 1011                                         | —                       | 12                      | —                        | V/V    |
|                              |                                | ADCGN [3:0] = 1100                                         | —                       | 13                      | —                        | V/V    |
|                              |                                | ADCGN [3:0] = 1101                                         | —                       | 14                      | —                        | V/V    |
|                              |                                | ADCGN [3:0] = 1110                                         | —                       | 15                      | —                        | V/V    |
|                              |                                | ADCGN [3:0] = 1111                                         | —                       | 16                      | —                        | V/V    |
| ADCGN <sub>TC</sub>          | Temperature drift of ADCGN     | ADCGN [3:0] = 1111                                         | —                       | -70                     | —                        | ppm/°C |
| <b>ANALOG INPUTS/OUTPUTS</b> |                                |                                                            |                         |                         |                          |        |
| V <sub>AiNx</sub>            | Absolute input voltage         | INBUF = 1                                                  | AVSS                    | —                       | AVDD - 0.6               | V      |
|                              |                                | INBUF = 0                                                  | AVSS                    | —                       | AVDD                     | V      |
| V <sub>IN</sub>              | Differential input voltage     | V <sub>IN</sub> = V <sub>AiNx+</sub> - V <sub>AiNx-</sub>  | —                       | ±V <sub>REF</sub> /Gain | —                        | V      |
| AVDD                         | Analog power supply            | AVDD to AVSS                                               | AVDD                    | 2.8                     | 3.6                      | V      |
| LR <sub>AVDD</sub>           | AVDD load regulation           | IOUT = 30mA                                                | -1%                     | —                       | +1%                      |        |
| AVDD <sub>TC</sub>           | Temperature drift of AVDD      |                                                            | —                       | 500                     | —                        | ppm/°C |
| VCM                          | Common mode voltage            | VCM to AVSS                                                | 0.6                     | (AVDD-0.3) / 2<br>(±5%) | AVDD - 1.0               | V      |
| VCM <sub>TC</sub>            | Temperature drift of VCM       |                                                            | —                       | 300                     | —                        | ppm/°C |
| <b>REFERENCE INPUTS</b>      |                                |                                                            |                         |                         |                          |        |
| V <sub>REF</sub>             | Differential reference voltage | V <sub>REF</sub> = V <sub>RiNx+</sub> - V <sub>RiNx-</sub> | 0.3                     | —                       | AVDD - AVSS              | V      |
| V <sub>RiNx+</sub>           | Positive reference voltage     | VRBUF = 0                                                  | V <sub>RiNx</sub> + 0.3 | —                       | AVDD                     | V      |
|                              |                                | VRBUF = 1                                                  | V <sub>RiNx</sub> + 0.3 | —                       | AVDD - 0.6               |        |
| V <sub>RiNx-</sub>           | Negative reference voltage     |                                                            | AVSS                    | —                       | V <sub>RiNx+</sub> - 0.3 | V      |
| REFGN                        | Reference Gain Ratio           | VRGN [1:0] = 00                                            | —                       | 1                       | —                        | V/V    |
|                              |                                | VRGN [1:0] = 01                                            | —                       | 0.5                     | —                        | V/V    |
|                              |                                | VRGN [1:0] = 10                                            | —                       | 0.75                    | —                        | V/V    |
|                              |                                | VRGN [1:0] = 11                                            | —                       | 0.25                    | —                        | V/V    |
| REFGN <sub>TC</sub>          | Temperature drift of REFGN     | VRGN [1:0] = 11                                            | —                       | ±10                     | —                        | ppm/°C |
| VREF <sub>IN1</sub>          | VREF1 from internal bandgap    |                                                            | —                       | 1.2                     | —                        | V      |
| VREF <sub>IN2</sub>          | VREF2 from internal bandgap    |                                                            | —                       | 0.8                     | —                        | V      |
| <b>DC INPUT OFFSET</b>       |                                |                                                            |                         |                         |                          |        |
| DCSET                        | Input DC offset adjustment     | DCSET [2:0] = 000                                          | —                       | 0                       | —                        | V      |
|                              |                                | DCSET [2:0] = 001                                          | —                       | 1/12.5VREF              | —                        | V      |
|                              |                                | DCSET [2:0] = 010                                          | —                       | 2/12.5VREF              | —                        | V      |
|                              |                                | DCSET [2:0] = 011                                          | —                       | 3/12.5VREF              | —                        | V      |
|                              |                                | DCSET [2:0] = 100                                          | —                       | 4/12.5VREF              | —                        | V      |

|                                               |                                |                         |        |            |            |        |
|-----------------------------------------------|--------------------------------|-------------------------|--------|------------|------------|--------|
|                                               |                                | DCSET [2:0] = 101       | —      | 5/12.5VREF | —          | V      |
|                                               |                                | DCSET [2:0] = 110       | —      | 6/12.5VREF | —          | V      |
|                                               |                                | DCSET [2:0] = 111       | —      | 7/12.5VREF | —          | V      |
| DCSET <sub>TC</sub>                           | Temperature drift of DCSET     | +1/12.5VREF             | —      | 10         | —          | ppm/°C |
| <b>IDAC CURRENT SOURCES (IDAC1, IDAC2)</b>    |                                |                         |        |            |            |        |
| IDACx                                         | V <sub>comp</sub> = 1.6V±0.02V | IDACx [6:0] = 0000000   | —      | 8.0        | —          | μA     |
|                                               |                                | IDACx [6:0] = 0000001   | —      | 16.0       | —          | μA     |
|                                               |                                | IDACx [6:0] = 0000010   | —      | 25.0       | —          | μA     |
|                                               |                                | IDACx [6:0] = 0000100   | —      | 45.0       | —          | μA     |
|                                               |                                | IDACx [6:0] = 0001000   | -1.5%  | 80.0       | +1.5%      | μA     |
|                                               |                                | IDACx [6:0] = 0010000   | —      | 150.0      | —          | μA     |
|                                               |                                | IDACx [6:0] = 0100000   | —      | 300.0      | —          | μA     |
|                                               |                                | IDACx [6:0] = 1000000   | —      | 590.0      | —          | μA     |
|                                               |                                | IDACx [6:0] = 1111111   | —      | 1150.0     | —          | μA     |
| V <sub>comp</sub>                             | Compliance voltage             |                         | 1.0    | —          | AVDD - 0.3 | V      |
| IDAC <sub>TC</sub>                            | Temperature drift of IDAC      | IDACx[6:0]_0001000      | —      | -60        | —          | ppm/°C |
| IDAC <sub>Vcomp</sub>                         | Compliance voltage vs. IDAC    |                         | —      | -2         | —          | %/V    |
| <b>BURN-OUT CURRENT</b>                       |                                |                         |        |            |            |        |
| I <sub>BODP</sub>                             | Burn-out source current        |                         | 4      | 5          | 6          | μA     |
| I <sub>BODN</sub>                             | Burn-out sink current          |                         | 3.5    | 4.5        | 5.5        | μA     |
| <b>DIGITAL INPUTS/OUTPUTS (SDA, SCL, EOC)</b> |                                |                         |        |            |            |        |
| V <sub>OL</sub>                               | Low-level output voltage       | I <sub>SINK</sub> = 4mA | —      | —          | 0.4        | V      |
| V <sub>IL</sub>                               | Low-level input voltage        | SDA, SCL                | 0.7VDD | —          | —          | V      |
| V <sub>IH</sub>                               | Low-level output voltage       | SDA, SCL                | —      | —          | 0.3VDD     | V      |
| I <sub>LEAK</sub>                             | Input leakage current          | SDA, SCL                | —      | —          | 1          | μA     |
| <b>INTERNAL CLOCK OSCILLATOR</b>              |                                |                         |        |            |            |        |
| F <sub>CLK</sub>                              | Master clock frequency         |                         | -2%    | 1.024      | +2%        | MHz    |
| T <sub>SUP</sub>                              | Clock start-up time            |                         | 1      | —          | —          | ms     |
| <b>INTERNAL TEMPERATURE SENSOR</b>            |                                |                         |        |            |            |        |
|                                               | Temperature accuracy           | -40 to 85°C             | —      | ± 3        | —          | °C     |
|                                               | Current consumption            |                         | —      | 35         | —          | μA     |
| <b>DIGITAL VOLTAGE MONITOR</b>                |                                |                         |        |            |            |        |
|                                               | VDD DIVIDER                    |                         | 0.2    | 0.25       | 0.3        | V/V    |
| <b>OPERATION TEMPERATURE</b>                  |                                |                         |        |            |            |        |
| T <sub>A</sub>                                | Ambient temperature            |                         | -40    | —          | 85         | °C     |

**I<sup>2</sup>C Digital Communication Timing Diagrams**

| Symbol             | Conditions                                | Min  | Max | Unit    |
|--------------------|-------------------------------------------|------|-----|---------|
| $f_{SCL}$          | SCL operating frequency                   | 2.5  | 100 | $\mu$ s |
| $t_{BUF}$          | Bus free time between STOP and START      | 1.3  | —   | us      |
| $t_{HDSTA}$        | Hold time after repeated START condition. | 600  | —   | ns      |
| $t_{SUSTA}$        | Repeated START condition setup time       | 600  | —   | ns      |
| $t_{SUSTO}$        | STOP condition setup time                 | 600  | —   | ns      |
| $t_{HDDAT}$        | Data hold time (*3)                       | 0    | —   | ns      |
| $t_{HSUDAT}$       | Data setup time                           | 100  | —   | ns      |
| $t_{LOW}$          | SCL clock low period                      | 1300 | —   | ns      |
| $t_{HIGH}$         | SCL clock high period                     | 600  | —   | ns      |
| $t_{VDAT}$         | Data valid time (*4)                      | —    | 900 | ns      |
| $t_{FDA}$          | Data fall time                            | —    | 300 | ns      |
| $t_R$              | Clock rise time                           | —    | 300 | ns      |
| $t_F$              | Clock fall time                           | —    | 300 | ns      |
| Time out           | Clock fall time                           | 100  | —   | ms      |
| $t_{RCClock/data}$ | rise time for SCL=100KHz                  | —    | 1   | $\mu$ s |

- (\*2) The host and device have the same VDD voltage. The voltages are based on statistical analysis of samples tested during initial release.
- (\*3) The maximum  $t_{HDDAT}$  can be 0.9us for fast mode, and is less than the maximum  $t_{VDAT}$  by a transition time.
- (\*4)  $t_{VDAT}$ =time for data signal from SCL LOW to SDA output (HIGH to LOW, depending on which is worst). = time for data signal from SCL LOW to SDA output (HIGH to LOW, depending on which is worse).

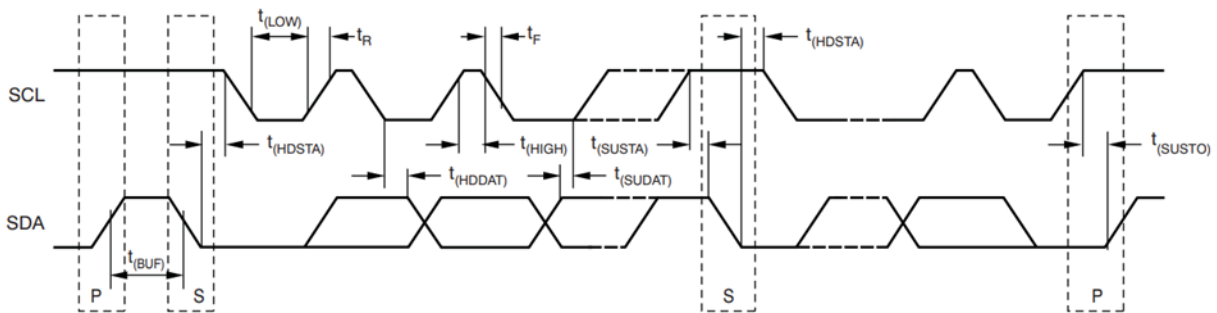


Figure 4 Time diagram of I<sup>2</sup>C protocol

**Performance Characteristics**

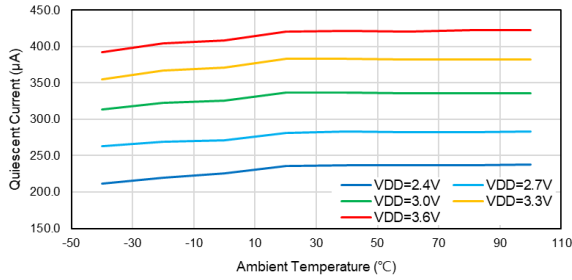


Figure 5 Current consumption vs. Temperature

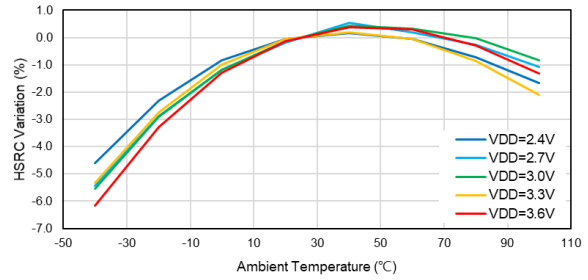


Figure 6 RC oscillator frequency vs. Temperature

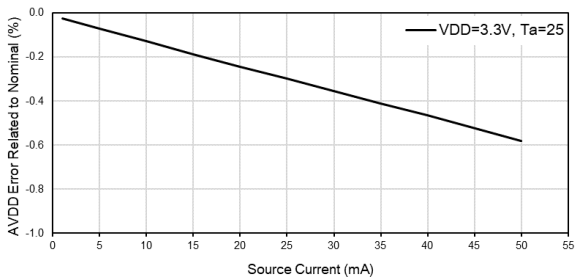


Figure 7 AVDD variation vs. Load current

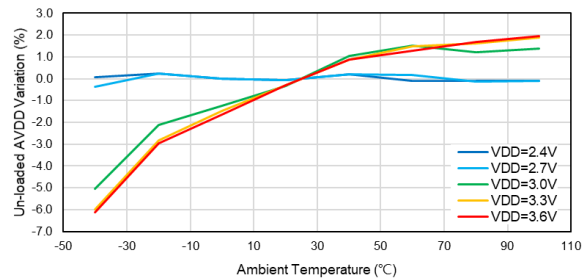


Figure 8 AVDD variation vs. Temperature

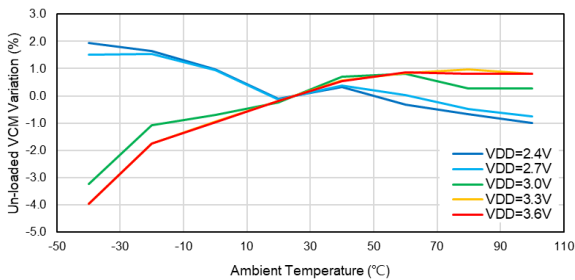


Figure 9 VCM variation vs. Temperature

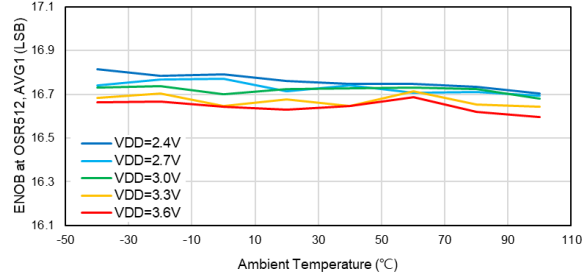


Figure 10 ENOB vs. Temperature

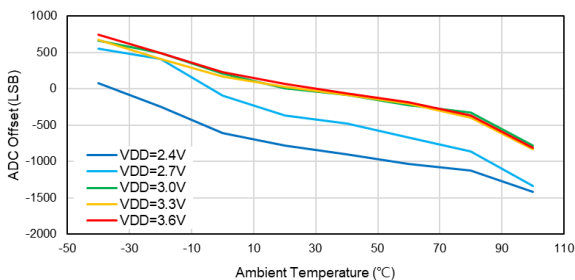


Figure 11 ADC Offset vs. Temperature

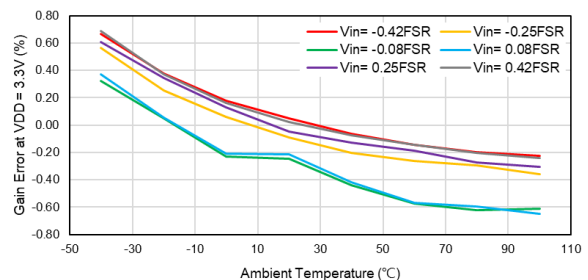


Figure 12 Gain Error vs. Temperature

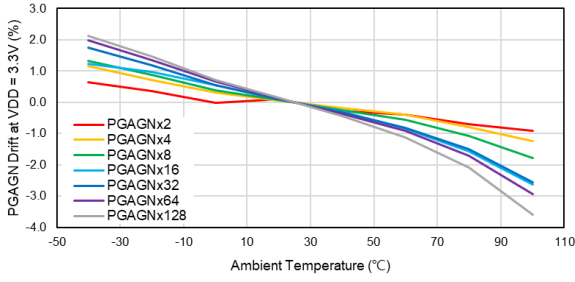


Figure 13 PGAGN vs. Temperature

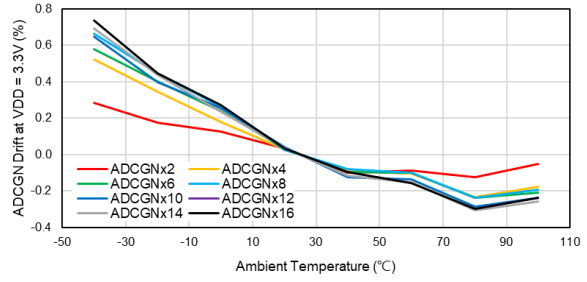


Figure 14 ADCGN vs. Temperature

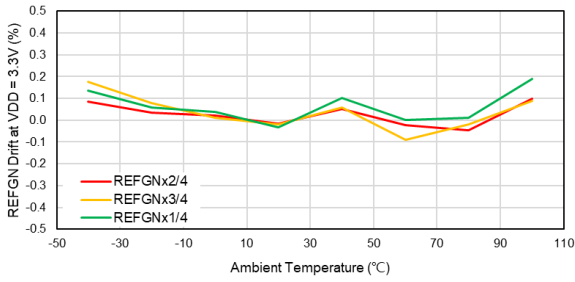


Figure 15 REFGN vs. Temperature

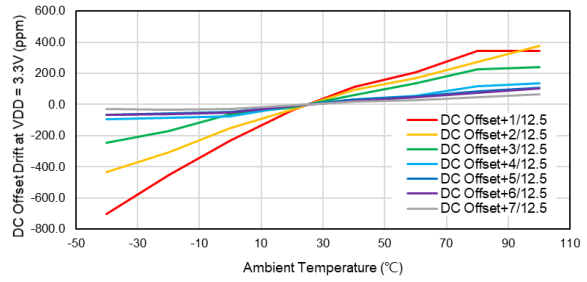


Figure 16 DC Offset vs. Temperature

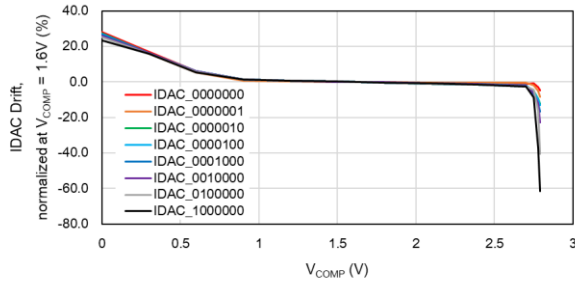


Figure 17 IDAC vs.  $V_{COMP}$

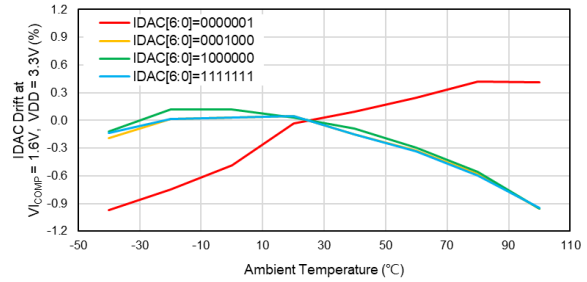


Figure 18 IDAC vs. Temperature

**Multiplexer Connection Network**

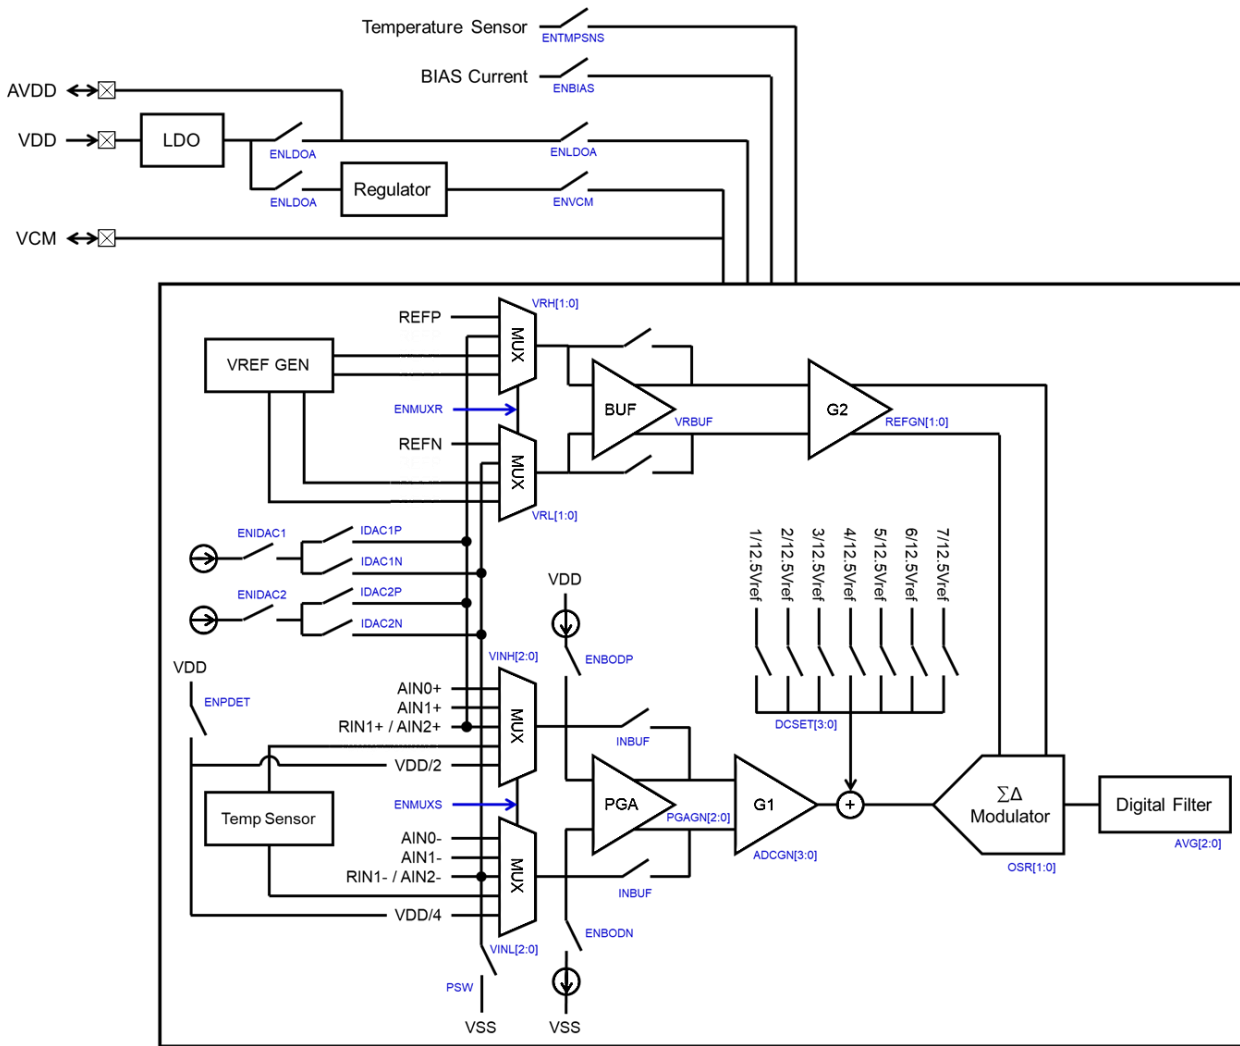


Figure 19 Multiplexer diagram of AFE6160A

**Noise and Resolution**

The performance of a sigma-delta ADC is typically specified in two forms: Root-Mean-Square (RMS) and Peal-to-Pead (PP) noise. Noise level decreases with longer oversampling intervals and lower gain setting. In practical, system designer requires a trade-off between Signal-to-Noise-Ratio (SNR) and Output Data Rate (ODR) to meet the application requirement.

The RMS noise can be expressed in term of Effective Number of Bits (ENOB), while and the PP noise is commonly specified as Noise-Free Bits resolution (NFB). The following equations illustrate the calculation of ENOB and NFB from the measured ADC.

$$RMS\ noise = \frac{FSR \times \sqrt{\frac{\sum_{i=0}^N (X_i - X_{avg})^2}{N}}}{2^n}, \quad ENOB = \text{Log}_2 \left( \frac{FSR}{RMS\ noise} \right)$$

$$PP\ noise = \frac{FSR \times (X_{max} - X_{min})}{2^n}, \quad NFB = \text{Log}_2 \left( \frac{FSR}{PP\ noise} \right)$$

The n represents the ADC resolution, X represents the ADC data and N is the amount of ADC data (recom-mend N > 1024). The AFE6160A is a differential, bipolar analog input sigma-delta converter with 24 bits 2’s complements digital output, so the n = 24 and FSR is 2 x V<sub>REF</sub>.

Table 1 to Table 4 summarize the ADC noise performance across different gain setting and ODR. Table 1 and Table 2 show the RMS noise (ENOB) and PP noise (NFB) using internal bandgap voltage, V<sub>REF\_IN1</sub>, while Table 3 and Table 4 show the data using ratiometric measurement. With ratiometric measurement, the noise from supply of Device Under Test (DUT) can be effectively canceled. Moreover, the noise of internal refer-ence and reference buffer are eliminated too, resulting in an improvement of ENOB by 1.5LSB. The AFE6160A also integrates a moving average digital filter, which further enhances noise performance without compromising the output data rate (ODR).

The 2<sup>nd</sup> gain amplifier, ADCGN, also amplifies the noise contributed from 1<sup>st</sup> gain amplifier, PGAGN. There-fore, ADCGN should primarily be used to increase the signal level when the maximum PGAGN setting is insufficient. Power consumption can be reduced without degrading the performance by enabling ADCGN while keeping PGAGN disabled. In this case, the RMS noise of PGAGN x16 (PGA enabled) and ADCGN x16 (PGA disabled) is the equivalent.

The recorded ADC amount is 2000 points, due to the statistical nature of noise, repeated noise measure-ments may yield higher or lower noise performance results.

Table 1 RMS noise in nV (ENOB).

| VDD = 3.3V, Ta = 25°C, AINx+ = 1.654V, AINx- = 1.646V, Vref = VREF <sub>IN1</sub><br>ADCCH=1, VRBUF=1, PGACH=1, INBUF=1              |     |      |                  |                  |                  |                 |                  |                  |                  |                  |
|--------------------------------------------------------------------------------------------------------------------------------------|-----|------|------------------|------------------|------------------|-----------------|------------------|------------------|------------------|------------------|
| OSR                                                                                                                                  | AVG | SPS  | PGAGN            |                  |                  |                 |                  |                  |                  |                  |
|                                                                                                                                      |     |      | x1               | x2               | x4               | x8              | x16              | x32              | x64              | x128             |
| 128                                                                                                                                  | 1   | 2000 | 61702<br>(15.25) | 31611<br>(15.21) | 15850<br>(15.21) | 8400<br>(15.12) | 4950<br>(14.89)  | 3432<br>(14.42)  | 2577<br>(13.83)  | 2527<br>(12.86)  |
| 256                                                                                                                                  | 1   | 1000 | 42691<br>(15.78) | 21474<br>(15.77) | 10860<br>(15.75) | 5936<br>(15.63) | 3548<br>(15.37)  | 2482<br>(14.88)  | 2097<br>(14.13)  | 1936<br>(13.24)  |
| 512                                                                                                                                  | 1   | 500  | 29283<br>(16.32) | 15082<br>(16.28) | 8031<br>(16.19)  | 4482<br>(16.03) | 2607<br>(15.81)  | 1858<br>(15.30)  | 1576<br>(14.55)  | 1781<br>(13.36)  |
| 1024                                                                                                                                 | 1   | 250  | 21030<br>(16.80) | 10698<br>(16.78) | 5693<br>(16.69)  | 3027<br>(16.60) | 1962<br>(16.22)  | 1504<br>(15.61)  | 1317<br>(14.80)  | 1299<br>(13.82)  |
|                                                                                                                                      | 2   |      | 16794<br>(17.12) | 8833<br>(17.05)  | 4707<br>(16.96)  | 2545<br>(16.85) | 1682<br>(16.44)  | 1281<br>(15.84)  | 1173<br>(14.96)  | 1216<br>(13.91)  |
|                                                                                                                                      | 4   |      | 13176<br>(17.47) | 6860<br>(17.42)  | 3590<br>(17.35)  | 2111<br>(17.12) | 1350<br>(16.76)  | 1055<br>(16.12)  | 1027<br>(15.16)  | 929<br>(14.30)   |
|                                                                                                                                      | 8   |      | 9924<br>(17.88)  | 5057<br>(17.86)  | 2787<br>(17.72)  | 1515<br>(17.60) | 1019<br>(17.17)  | 880<br>(16.38)   | 859<br>(15.41)   | 741<br>(14.63)   |
|                                                                                                                                      | 16  |      | 6683<br>(18.75)  | 3636<br>(18.33)  | 1926<br>(18.25)  | 1185<br>(17.95) | 782<br>(17.55)   | 779<br>(16.56)   | 628<br>(15.87)   | 556<br>(15.04)   |
|                                                                                                                                      | 32  |      | 5114<br>(18.84)  | 2326<br>(18.98)  | 1431<br>(18.68)  | 921<br>(18.31)  | 679<br>(17.75)   | 610<br>(16.91)   | 520<br>(16.14)   | 571<br>(15.00)   |
|                                                                                                                                      | 64  |      | 3327<br>(19.46)  | 1921<br>(19.25)  | 949<br>(19.27)   | 775<br>(18.56)  | 889<br>(17.36)   | 475<br>(17.27)   | 459<br>(16.32)   | 552<br>(15.05)   |
|                                                                                                                                      | 128 |      | 2182<br>(20.07)  | 1855<br>(19.30)  | 790<br>(19.53)   | 896<br>(18.35)  | 641<br>(17.84)   | 840<br>(16.45)   | 327<br>(16.81)   | 285<br>(16.01)   |
| VDD = 3.3V, Ta = 25°C, AINx+ = 1.654V, AINx- = 1.646V, Vref = VREF <sub>IN1</sub><br>ADCCH=1, VRBUF=1, PGACH=1, INBUF=1, PGAGN=[000] |     |      |                  |                  |                  |                 |                  |                  |                  |                  |
| OSR                                                                                                                                  | AVG | SPS  | ADCGN            |                  |                  |                 | REFGN            |                  |                  |                  |
|                                                                                                                                      |     |      | x1               | x4               | x8               | x16             | x1               | x0.75            | x0.5             | x0.25            |
| 128                                                                                                                                  | 1   | 2000 | 59340<br>(15.30) | 19261<br>(14.93) | 13454<br>(14.44) | 9373<br>(13.97) | 61704<br>(15.25) | 51772<br>(15.09) | 41681<br>(14.81) | 27110<br>(14.43) |
| 256                                                                                                                                  | 1   | 1000 | 41591<br>(15.82) | 13610<br>(15.43) | 9469<br>(14.95)  | 6873<br>(14.41) | 42572<br>(15.78) | 34063<br>(15.69) | 25610<br>(15.52) | 18157<br>(15.01) |
| 512                                                                                                                                  | 1   | 500  | 29222<br>(16.63) | 9727<br>(15.91)  | 6575<br>(15.48)  | 4789<br>(14.93) | 30771<br>(16.25) | 23805<br>(16.21) | 17766<br>(16.04) | 12438<br>(15.56) |
| 1024                                                                                                                                 | 1   | 250  | 21321<br>(16.78) | 6930<br>(16.40)  | 4664<br>(15.97)  | 3476<br>(15.40) | 21105<br>(16.80) | 16319<br>(16.75) | 12177<br>(16.59) | 8720<br>(16.07)  |
|                                                                                                                                      | 2   |      | 17061<br>(17.10) | 5799<br>(16.66)  | 3984<br>(16.20)  | 2967<br>(15.63) | 18272<br>(17.00) | 15158<br>(16.86) | 10773<br>(16.77) | 7569<br>(16.27)  |
|                                                                                                                                      | 4   |      | 12484<br>(17.55) | 4405<br>(17.06)  | 3193<br>(16.52)  | 2289<br>(16.00) | 13292<br>(17.46) | 10663<br>(17.37) | 8243<br>(17.15)  | 5799<br>(16.66)  |
|                                                                                                                                      | 8   |      | 9008<br>(18.02)  | 3560<br>(17.36)  | 2291<br>(17.00)  | 1975<br>(16.21) | 9651<br>(17.92)  | 8129<br>(17.76)  | 6039<br>(17.60)  | 4192<br>(17.13)  |
|                                                                                                                                      | 16  |      | 6307<br>(18.54)  | 2172<br>(18.08)  | 1709<br>(17.42)  | 1246<br>(16.88) | 6967<br>(18.39)  | 5531<br>(18.31)  | 3852<br>(18.25)  | 2727<br>(17.75)  |
|                                                                                                                                      | 32  |      | 4913<br>(18.90)  | 1592<br>(18.52)  | 1203<br>(17.93)  | 1022<br>(17.16) | 4871<br>(18.91)  | 3999<br>(18.78)  | 2741<br>(18.74)  | 1837<br>(18.32)  |
|                                                                                                                                      | 64  |      | 3450<br>(19.41)  | 1388<br>(18.72)  | 781<br>(18.55)   | 669<br>(17.77)  | 3161<br>(19.53)  | 3110<br>(19.14)  | 2220<br>(19.04)  | 1418<br>(18.69)  |
|                                                                                                                                      | 128 |      | 2346<br>(19.96)  | 698<br>(19.71)   | 706<br>(18.70)   | 634<br>(17.85)  | 2460<br>(19.90)  | 2840<br>(19.27)  | 1457<br>(19.65)  | 974<br>(19.23)   |

Table 2 PP noise in nV (NFB).

| VDD = 3.3V, Ta = 25°C, AINx+ = 1.654V, AINx- = 1.646V, Vref = VREF <sub>IN1</sub><br>ADCCH=1, VRBUF=1, PGACH=1, INBUF=1              |     |      |                   |                   |                   |                  |                   |                   |                   |                   |
|--------------------------------------------------------------------------------------------------------------------------------------|-----|------|-------------------|-------------------|-------------------|------------------|-------------------|-------------------|-------------------|-------------------|
| OSR                                                                                                                                  | AVG | SPS  | PGAGN             |                   |                   |                  |                   |                   |                   |                   |
|                                                                                                                                      |     |      | x1                | x2                | x4                | x8               | x16               | x32               | x64               | x128              |
| 128                                                                                                                                  | 1   | 2000 | 413132<br>(12.50) | 205421<br>(12.51) | 109577<br>(12.42) | 67091<br>(12.13) | 33045<br>(12.15)  | 26965<br>(11.44)  | 18185<br>(11.01)  | 16066<br>(10.19)  |
| 256                                                                                                                                  | 1   | 1000 | 298834<br>(12.97) | 152206<br>(12.94) | 73063<br>(13.00)  | 36657<br>(13.00) | 23532<br>(12.64)  | 14667<br>(12.32)  | 13749<br>(11.41)  | 13251<br>(10.47)  |
| 512                                                                                                                                  | 1   | 500  | 199699<br>(13.55) | 104856<br>(13.48) | 60260<br>(13.28)  | 29933<br>(13.29) | 16791<br>(13.13)  | 12937<br>(12.50)  | 10834<br>(11.76)  | 10974<br>(10.74)  |
| 1024                                                                                                                                 | 1   | 250  | 139475<br>(14.07) | 67663<br>(14.11)  | 35906<br>(14.03)  | 22119<br>(13.73) | 11677<br>(13.65)  | 10657<br>(12.78)  | 9059<br>(12.02)   | 8316<br>(11.14)   |
|                                                                                                                                      | 2   |      | 113010<br>(14.37) | 60010<br>(14.29)  | 30327<br>(14.27)  | 18185<br>(14.01) | 12168<br>(13.59)  | 8681<br>(13.08)   | 7921<br>(12.21)   | 8250<br>(11.15)   |
|                                                                                                                                      | 4   |      | 101566<br>(14.53) | 43344<br>(14.76)  | 24712<br>(14.57)  | 15092<br>(14.28) | 8628<br>(14.09)   | 6321<br>(13.53)   | 6706<br>(12.45)   | 6172<br>(11.57)   |
|                                                                                                                                      | 8   |      | 60511<br>(15.28)  | 31829<br>(15.20)  | 19741<br>(14.89)  | 10282<br>(14.83) | 5883<br>(14.64)   | 5320<br>(13.78)   | 4949<br>(12.89)   | 5803<br>(11.66)   |
|                                                                                                                                      | 16  |      | 38767<br>(15.92)  | 26965<br>(15.44)  | 11587<br>(15.66)  | 7135<br>(15.36)  | 4622<br>(14.99)   | 4886<br>(13.91)   | 3507<br>(13.38)   | 3039<br>(12.59)   |
|                                                                                                                                      | 32  |      | 26608<br>(16.46)  | 13375<br>(16.45)  | 8225<br>(16.15)   | 4381<br>(16.06)  | 4274<br>(15.10)   | 3317<br>(14.46)   | 2642<br>(13.79)   | 2482<br>(12.88)   |
|                                                                                                                                      | 64  |      | 18597<br>(16.98)  | 9584<br>(16.93)   | 5651<br>(16.70)   | 3970<br>(16.21)  | 3988<br>(15.20)   | 2383<br>(14.94)   | 2740<br>(13.74)   | 2788<br>(12.72)   |
|                                                                                                                                      | 128 |      | 10872<br>(17.75)  | 9012<br>(17.02)   | 3684<br>(17.31)   | 3541<br>(16.37)  | 2950<br>(15.63)   | 2803<br>(14.71)   | 1826<br>(14.33)   | 1272<br>(13.85)   |
| VDD = 3.3V, Ta = 25°C, AINx+ = 1.654V, AINx- = 1.646V, Vref = VREF <sub>IN1</sub><br>ADCCH=1, VRBUF=1, PGACH=1, INBUF=1, PGAGN=[000] |     |      |                   |                   |                   |                  |                   |                   |                   |                   |
| OSR                                                                                                                                  | AVG | SPS  | ADCGN             |                   |                   |                  | REFGN             |                   |                   |                   |
|                                                                                                                                      |     |      | x1                | x4                | x8                | x16              | x1                | x0.75             | x0.5              | x0.25             |
| 128                                                                                                                                  | 1   | 2000 | 373077<br>(12.65) | 131607<br>(12.15) | 96273<br>(11.61)  | 73528<br>(10.99) | 389099<br>(12.59) | 360489<br>(12.29) | 278664<br>(12.07) | 186253<br>(11.65) |
| 256                                                                                                                                  | 1   | 1000 | 299549<br>(12.97) | 99564<br>(12.56)  | 59777<br>(12.29)  | 51588<br>(11.51) | 296688<br>(12.98) | 234962<br>(12.90) | 154853<br>(12.92) | 114906<br>(12.35) |
| 512                                                                                                                                  | 1   | 500  | 205135<br>(13.51) | 61798<br>(13.25)  | 44954<br>(12.70)  | 33313<br>(12.14) | 222731<br>(13.40) | 175524<br>(13.32) | 125027<br>(13.23) | 84829<br>(12.79)  |
| 1024                                                                                                                                 | 1   | 250  | 144339<br>(14.02) | 47314<br>(13.63)  | 31954<br>(13.20)  | 23568<br>(12.64) | 155354<br>(13.92) | 98491<br>(14.16)  | 89979<br>(13.70)  | 58544<br>(13.32)  |
|                                                                                                                                      | 2   |      | 116158<br>(14.33) | 40734<br>(13.85)  | 28914<br>(13.34)  | 20447<br>(12.84) | 130033<br>(14.17) | 107718<br>(14.03) | 73385<br>(14.00)  | 55969<br>(13.39)  |
|                                                                                                                                      | 4   |      | 88692<br>(14.72)  | 32651<br>(14.17)  | 19294<br>(13.92)  | 15485<br>(13.24) | 83113<br>(14.82)  | 69845<br>(14.65)  | 58150<br>(14.33)  | 41270<br>(13.83)  |
|                                                                                                                                      | 8   |      | 55361<br>(15.40)  | 21493<br>(14.77)  | 13983<br>(14.39)  | 12463<br>(13.55) | 57364<br>(15.35)  | 48280<br>(15.19)  | 42915<br>(14.77)  | 29683<br>(14.30)  |
|                                                                                                                                      | 16  |      | 39768<br>(15.88)  | 16022<br>(15.19)  | 9727<br>(14.91)   | 8458<br>(14.11)  | 43917<br>(15.74)  | 34869<br>(15.66)  | 25392<br>(15.53)  | 17667<br>(15.05)  |
|                                                                                                                                      | 32  |      | 27895<br>(16.39)  | 9191<br>(15.99)   | 6974<br>(15.39)   | 4962<br>(14.88)  | 29182<br>(16.33)  | 26071<br>(16.08)  | 16952<br>(16.11)  | 12338<br>(15.57)  |
|                                                                                                                                      | 64  |      | 18883<br>(16.96)  | 7153<br>(16.36)   | 4256<br>(16.11)   | 4318<br>(15.08)  | 17595<br>(17.06)  | 16415<br>(16.74)  | 11730<br>(16.64)  | 7904<br>(16.21)   |
|                                                                                                                                      | 128 |      | 10586<br>(17.79)  | 3541<br>(17.37)   | 3076<br>(16.57)   | 3469<br>(15.40)  | 11301<br>(17.70)  | 11802<br>(17.22)  | 6509<br>(17.49)   | 4756<br>(16.94)   |

Table 3 RMS noise in nV (ENOB).

| VDD = 3.3V, Ta = 25°C, Ratiometric Measurement<br>ADCCH=1, VRBUF=0, PGACH=1, INBUF=1              |     |      |                  |                  |                 |                 |                  |                  |                  |                  |
|---------------------------------------------------------------------------------------------------|-----|------|------------------|------------------|-----------------|-----------------|------------------|------------------|------------------|------------------|
| OSR                                                                                               | AVG | SPS  | PGAGN            |                  |                 |                 |                  |                  |                  |                  |
|                                                                                                   |     |      | x1               | x2               | x4              | x8              | x16              | x32              | x64              | x128             |
| 128                                                                                               | 1   | 2000 | 36793<br>(15.99) | 15016<br>(16.29) | 8085<br>(16.18) | 4178<br>(16.13) | 2358<br>(15.96)  | 1674<br>(15.45)  | 1367<br>(14.74)  | 1296<br>(13.82)  |
| 256                                                                                               | 1   | 1000 | 14596<br>(17.23) | 7562<br>(17.28)  | 4069<br>(17.17) | 2238<br>(17.03) | 1505<br>(16.60)  | 1127<br>(16.02)  | 1060<br>(15.11)  | 915<br>(14.32)   |
| 512                                                                                               | 1   | 500  | 9278<br>(17.98)  | 5108<br>(17.84)  | 2780<br>(17.72) | 1613<br>(17.50) | 1060<br>(17.11)  | 781<br>(16.55)   | 671<br>(15.77)   | 636<br>(14.85)   |
| 1024                                                                                              | 1   | 250  | 6489<br>(18.50)  | 3487<br>(18.39)  | 1923<br>(18.25) | 1133<br>(18.01) | 757<br>(17.60)   | 569<br>(17.01)   | 487<br>(16.23)   | 454<br>(15.33)   |
|                                                                                                   | 2   |      | 5618<br>(18.70)  | 2944<br>(18.64)  | 1629<br>(18.49) | 982<br>(18.22)  | 606<br>(17.92)   | 484<br>(17.24)   | 414<br>(16.47)   | 392<br>(15.55)   |
|                                                                                                   | 4   |      | 4267<br>(19.10)  | 2206<br>(19.05)  | 1243<br>(18.88) | 726<br>(18.66)  | 496<br>(18.21)   | 336<br>(17.77)   | 304<br>(16.91)   | 280<br>(16.03)   |
|                                                                                                   | 8   |      | 2941<br>(19.64)  | 1602<br>(19.51)  | 921<br>(19.31)  | 541<br>(19.08)  | 349<br>(18.71)   | 263<br>(18.12)   | 236<br>(17.28)   | 217<br>(16.40)   |
|                                                                                                   | 16  |      | 2187<br>(20.07)  | 1233<br>(19.89)  | 649<br>(19.82)  | 389<br>(19.56)  | 249<br>(19.20)   | 192<br>(18.57)   | 177<br>(17.69)   | 170<br>(16.75)   |
|                                                                                                   | 32  |      | 1508<br>(20.60)  | 789<br>(20.54)   | 399<br>(20.52)  | 247<br>(20.21)  | 156<br>(19.88)   | 151<br>(18.92)   | 122<br>(18.23)   | 137<br>(17.06)   |
|                                                                                                   | 64  |      | 998<br>(21.20)   | 474<br>(21.27)   | 313<br>(20.87)  | 193<br>(20.57)  | 143<br>(20.00)   | 102<br>(19.49)   | 85<br>(18.75)    | 94<br>(17.61)    |
|                                                                                                   | 128 |      | 784<br>(21.55)   | 472<br>(21.28)   | 180<br>(21.67)  | 133<br>(21.11)  | 100<br>(20.52)   | 95<br>(19.58)    | 88<br>(18.71)    | 74<br>(17.96)    |
| VDD = 3.3V, Ta = 25°C, Ratiometric Measurement<br>ADCCH=1, VRBUF=0, PGACH=1, INBUF=1, PGAGN=[000] |     |      |                  |                  |                 |                 |                  |                  |                  |                  |
| OSR                                                                                               | AVG | SPS  | ADCGN            |                  |                 |                 | REFGN            |                  |                  |                  |
|                                                                                                   |     |      | x1               | x4               | x8              | x16             | x1               | x0.75            | x0.5             | x0.25            |
| 128                                                                                               | 1   | 2000 | 36143<br>(16.02) | 11022<br>(15.73) | 7367<br>(15.31) | 5567<br>(14.72) | 34647<br>(16.08) | 25225<br>(16.12) | 38779<br>(14.92) | 16422<br>(15.16) |
| 256                                                                                               | 1   | 1000 | 14144<br>(17.37) | 6417<br>(16.51)  | 4828<br>(15.92) | 3728<br>(15.30) | 14507<br>(17.34) | 11522<br>(17.25) | 9962<br>(16.88)  | 8931<br>(16.04)  |
| 512                                                                                               | 1   | 500  | 9082<br>(18.01)  | 4476<br>(17.03)  | 3420<br>(16.42) | 2656<br>(15.79) | 9448<br>(17.95)  | 8094<br>(17.76)  | 6686<br>(17.45)  | 6171<br>(16.57)  |
| 1024                                                                                              | 1   | 250  | 6796<br>(18.43)  | 3163<br>(17.53)  | 2527<br>(16.86) | 1856<br>(16.30) | 6432<br>(18.51)  | 5412<br>(18.34)  | 4819<br>(17.93)  | 4187<br>(17.13)  |
|                                                                                                   | 2   |      | 5392<br>(18.76)  | 2615<br>(17.81)  | 2042<br>(17.16) | 1608<br>(16.51) | 5512<br>(18.73)  | 4634<br>(18.57)  | 3945<br>(18.21)  | 3609<br>(17.34)  |
|                                                                                                   | 4   |      | 4247<br>(19.11)  | 1974<br>(18.21)  | 1541<br>(17.57) | 1259<br>(16.86) | 4201<br>(19.12)  | 3546<br>(18.95)  | 3231<br>(18.50)  | 2732<br>(17.74)  |
|                                                                                                   | 8   |      | 3053<br>(19.58)  | 1479<br>(18.63)  | 1148<br>(18.00) | 891<br>(17.36)  | 2873<br>(19.67)  | 2447<br>(19.49)  | 2194<br>(19.06)  | 1920<br>(18.25)  |
|                                                                                                   | 16  |      | 2472<br>(19.89)  | 1013<br>(19.18)  | 820<br>(18.48)  | 606<br>(17.92)  | 2033<br>(20.17)  | 2004<br>(19.78)  | 1517<br>(19.59)  | 1400<br>(18.71)  |
|                                                                                                   | 32  |      | 2063<br>(20.15)  | 1068<br>(19.10)  | 797<br>(18.52)  | 609<br>(17.91)  | 1604<br>(20.51)  | 1241<br>(20.47)  | 1243<br>(19.88)  | 1136<br>(19.01)  |
|                                                                                                   | 64  |      | 1067<br>(21.10)  | 545<br>(20.07)   | 454<br>(19.33)  | 308<br>(18.90)  | 1125<br>(21.02)  | 927<br>(20.89)   | 859<br>(20.41)   | 724<br>(19.66)   |
|                                                                                                   | 128 |      | 893<br>(21.36)   | 334<br>(20.78)   | 281<br>(20.03)  | 223<br>(19.36)  | 734<br>(21.64)   | 767<br>(21.16)   | 513<br>(21.16)   | 440<br>(20.38)   |

Table 4 PP noise in nV (NFB).

| VDD = 3.3V, Ta = 25°C, Ratiometric Measurement<br>ADCCH=1, VRBUF=0, PGACH=1, INBUF=1              |     |      |                   |                   |                  |                  |                   |                   |                   |                  |
|---------------------------------------------------------------------------------------------------|-----|------|-------------------|-------------------|------------------|------------------|-------------------|-------------------|-------------------|------------------|
| OSR                                                                                               | AVG | SPS  | PGAGN             |                   |                  |                  |                   |                   |                   |                  |
|                                                                                                   |     |      | x1                | x2                | x4               | x8               | x16               | x32               | x64               | x128             |
| 128                                                                                               | 1   | 2000 | 215149<br>(13.45) | 102425<br>(13.52) | 57220<br>(13.36) | 28467<br>(13.36) | 16522<br>(13.15)  | 12589<br>(12.54)  | 8494<br>(12.11)   | 9361<br>(10.97)  |
| 256                                                                                               | 1   | 1000 | 103712<br>(14.50) | 52357<br>(14.48)  | 25213<br>(14.54) | 17810<br>(14.04) | 10148<br>(13.85)  | 8163<br>(13.17)   | 8603<br>(12.09)   | 5799<br>(11.66)  |
| 512                                                                                               | 1   | 500  | 66376<br>(15.14)  | 35262<br>(15.05)  | 18811<br>(14.96) | 11784<br>(14.64) | 7010<br>(14.39)   | 6679<br>(13.46)   | 5069<br>(12.85)   | 4416<br>(12.05)  |
| 1024S                                                                                             | 1   | 250  | 40054<br>(15.87)  | 22459<br>(15.71)  | 13733<br>(15.42) | 7921<br>(15.21)  | 5695<br>(14.68)   | 3549<br>(14.37)   | 3688<br>(13.31)   | 2965<br>(12.63)  |
|                                                                                                   | 2   |      | 38338<br>(15.93)  | 19598<br>(15.90)  | 10693<br>(15.78) | 6330<br>(15.53)  | 3970<br>(15.21)   | 3143<br>(14.54)   | 3138<br>(13.54)   | 2971<br>(12.62)  |
|                                                                                                   | 4   |      | 27895<br>(16.39)  | 14949<br>(16.29)  | 8225<br>(16.15)  | 4435<br>(16.05)  | 3228<br>(15.50)   | 1962<br>(15.22)   | 2025<br>(14.18)   | 1988<br>(13.20)  |
|                                                                                                   | 8   |      | 20456<br>(16.84)  | 9084<br>(17.01)   | 5293<br>(16.79)  | 3219<br>(16.51)  | 2387<br>(15.94)   | 1739<br>(15.40)   | 1498<br>(14.61)   | 1243<br>(13.88)  |
|                                                                                                   | 16  |      | 13590<br>(17.43)  | 6866<br>(17.42)   | 4005<br>(17.19)  | 2342<br>(16.97)  | 1591<br>(16.52)   | 1198<br>(15.93)   | 1100<br>(15.06)   | 980<br>(14.22)   |
|                                                                                                   | 32  |      | 9298<br>(17.98)   | 4220<br>(18.12)   | 2468<br>(17.89)  | 1448<br>(17.66)  | 1055<br>(17.12)   | 894<br>(16.36)    | 729<br>(15.65)    | 895<br>(14.35)   |
|                                                                                                   | 64  |      | 6008<br>(18.61)   | 2789<br>(18.71)   | 1824<br>(18.33)  | 1073<br>(18.09)  | 706<br>(17.70)    | 519<br>(17.14)    | 393<br>(16.54)    | 477<br>(15.26)   |
|                                                                                                   | 128 |      | 3719<br>(19.30)   | 2217<br>(19.05)   | 1037<br>(19.14)  | 679<br>(18.75)   | 510<br>(18.17)    | 380<br>(17.59)    | 418<br>(16.45)    | 358<br>(15.68)   |
| VDD = 3.3V, Ta = 25°C, Ratiometric Measurement<br>ADCCH=1, VRBUF=0, PGACH=1, INBUF=1, PGAGN=[000] |     |      |                   |                   |                  |                  |                   |                   |                   |                  |
| OSR                                                                                               | AVG | SPS  | ADCGN             |                   |                  |                  | REFGN             |                   |                   |                  |
|                                                                                                   |     |      | x1                | x4                | x8               | x16              | x1                | x0.75             | x0.5              | x0.25            |
| 128                                                                                               | 1   | 2000 | 231171<br>(13.34) | 73814<br>(12.99)  | 52929<br>(12.47) | 38767<br>(11.92) | 258636<br>(13.18) | 167370<br>(13.39) | 225449<br>(12.38) | 94414<br>(12.63) |
| 256                                                                                               | 1   | 1000 | 92983<br>(14.66)  | 40126<br>(13.87)  | 33242<br>(13.13) | 25517<br>(12.52) | 86546<br>(14.76)  | 81861<br>(14.42)  | 70667<br>(14.05)  | 57364<br>(13.35) |
| 512                                                                                               | 1   | 500  | 57220<br>(15.36)  | 29576<br>(14.31)  | 21440<br>(13.77) | 17801<br>(13.04) | 62227<br>(15.24)  | 56863<br>(14.95)  | 43416<br>(14.75)  | 44882<br>(13.71) |
| 1024                                                                                              | 1   | 250  | 41914<br>(15.81)  | 23210<br>(14.66)  | 17005<br>(14.11) | 14314<br>(13.36) | 47636<br>(15.62)  | 35512<br>(15.63)  | 35477<br>(15.05)  | 30148<br>(14.28) |
|                                                                                                   | 2   |      | 35620<br>(16.04)  | 18847<br>(14.96)  | 14162<br>(14.37) | 11659<br>(13.65) | 42343<br>(15.79)  | 33474<br>(15.71)  | 32258<br>(15.18)  | 20885<br>(14.81) |
|                                                                                                   | 4   |      | 26321<br>(16.48)  | 15271<br>(15.26)  | 11122<br>(14.72) | 8377<br>(14.13)  | 29182<br>(16.33)  | 25105<br>(16.13)  | 20814<br>(15.82)  | 18418<br>(14.99) |
|                                                                                                   | 8   |      | 21029<br>(16.80)  | 11158<br>(15.71)  | 7975<br>(15.20)  | 5686<br>(14.69)  | 20027<br>(16.87)  | 19097<br>(16.52)  | 13661<br>(16.42)  | 12660<br>(15.53) |
|                                                                                                   | 16  |      | 16165<br>(17.18)  | 6187<br>(16.57)   | 4631<br>(15.98)  | 3514<br>(15.38)  | 15163<br>(17.27)  | 10407<br>(17.40)  | 9155<br>(17.00)   | 8047<br>(16.19)  |
|                                                                                                   | 32  |      | 11730<br>(17.64)  | 7081<br>(16.37)   | 4900<br>(15.90)  | 3666<br>(15.32)  | 10157<br>(17.85)  | 7617<br>(17.85)   | 7081<br>(17.37)   | 6258<br>(16.55)  |
|                                                                                                   | 64  |      | 6008<br>(18.61)   | 3290<br>(17.48)   | 2289<br>(17.00)  | 1681<br>(16.45)  | 6294<br>(18.54)   | 4292<br>(18.68)   | 4363<br>(18.07)   | 3648<br>(17.33)  |
|                                                                                                   | 128 |      | 4578<br>(19.00)   | 1681<br>(18.45)   | 1341<br>(17.77)  | 1082<br>(17.08)  | 3433<br>(19.42)   | 3755<br>(18.87)   | 2789<br>(18.71)   | 2253<br>(18.02)  |

**System Description**

**Overview**

The AFE6160A is a low-noise, low power 24-bit sigma-delta ADC integrating many features to reduce Bill of Material (BOM) cost of the system for sensor signal measurement. An on-chip temperature sensor and power supply monitor record the condition of environment without extra sensors.

The device provides two precision current sources and one voltage source for sensor excitation, and a built-in open/short diagnostic function. Three differential signal input channels and two differential reference input channels give flexible measurement configuration.

A two-stage signal amplifier allows signal amplification up to x2048, while a reference gain amplifier can shrink the Full-Scale Range (FSR) of sigma-delta ADC, effectively achieving x8192 overall signal amplification. A Built-in DC offset ensure that the input signal is at the proper level of FSR for ADC acquisition.

The AFE6160A supports four configurable ODR and a moving-average digital filter, the digital filter can enhance the performance of SDADC without reducing ODR. Two conversion mode are available: one-shot conversion and continuous conversion mode. To access the valid and latest data, reading should be performed through standard I<sup>2</sup>C interface after the EOC signal is asserted.

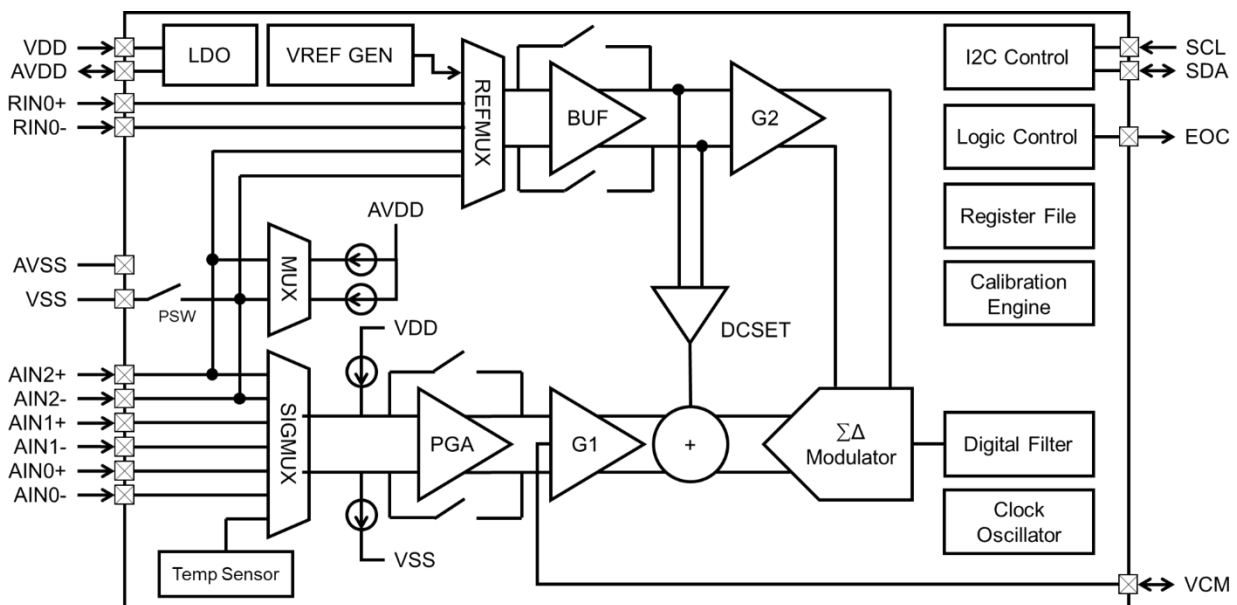


Figure 20 Function block diagram of AFE6160A

## Power Supplies and Monitor

The AFE6160A has one digital power supply input, VDD, one analog power supply, AVDD, and one common mode voltage supply, VCM. VDD regulates the AVDD and powers the digital section of the AFE6160A, including clock generator and digital processing circuits. AVDD regulates the VCM and powers other analog section of AFE6160A such as PGA and sigma-delta ADC. In addition, AVDD can be used as a voltage source for external sensor excitation, the loading ability is about 30mA.

An external voltage power can be applied to AVDD, according to the [Figure 19](#), the external AVDD must be greater than internal AVDD, the rail range of PGAGN, ADCGN and the input range of external reference could be benefited.

AFE6160A builds-in a supply voltage monitor function, the VDD voltage will be attenuated internally by one-fourth and applied to the channel 4 of signal multiplexer. This function can monitor the voltage variation from power supply during the measurement.

## Reset

The AFE6160 only supports software reset, the device could be reset by sending a fixed I<sup>2</sup>C pattern. The device responds to the two-wire general call address (0000 000) if the LSB bit is 0. The device acknowledges the general call address and responds to commands in the 2<sup>nd</sup> byte. If the 2<sup>nd</sup> byte is 0000 0110, the AFE6160A resets the internal registers to default values.

## Digital Communication Interface

The communication interface of AFE6160A is compatible with standard I<sup>2</sup>C, the speed of SCL supports up to 1MHz fast mode (SDA and SCL timing requirements are followed the standard). AFE6160A operates as a slave device, a controller or master device could access the register data via I<sup>2</sup>C protocol.

Both SDA and SCL lines use open-drain I/O mode, requiring an external pull-up resistor to read the right status. Schmitt triggers are implemented on both SDA and SCL input to minimize the effects of signal fluctuations caused by noisy environment.

If the SCL line is held at low level by the master more than 16ms (typ.) after a START condition, the AFE6160A reset its internal I<sup>2</sup>C state machine to prevent the bus hang-up. After reset, the SDA would be released and the device waits for the next START condition.

I<sup>2</sup>C communication becomes available 5ms after Power on Reset (POR) or software reset. During the 5ms period, if the level of AVDD is exceed 0.5V, the I<sup>2</sup>C interface enters the protection mode and address matching would always NACK. To exit protection mode, hold the level of AVDD below 0.5V for at least 5ms.

**Register File**

The built-in register file can be configured to control the functions of AFE6160A. After POR or software reset, the registers will be set to default value.

**Time Diagram & Slave Address**

In accordance with standard I<sup>2</sup>C protocol, a slave device requires a 7-bit I<sup>2</sup>C address to be recognized on the I<sup>2</sup>C bus. During communication, the 8<sup>th</sup> bit of slave address indicates the transfer direction (read or write). The AFE6160A uses a fixed 7-bit I<sup>2</sup>C address 1001000 (or 0x48H) and Figure 21 and Figure 22 illustrate the time diagram of I<sup>2</sup>C timing diagrams for read and write operations.

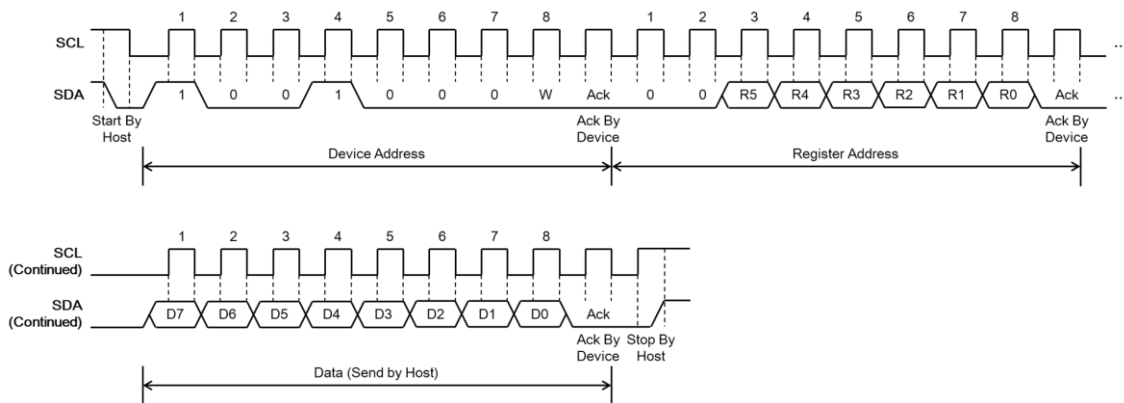


Figure 21 Two-wire timing diagram for Write Single Byte format

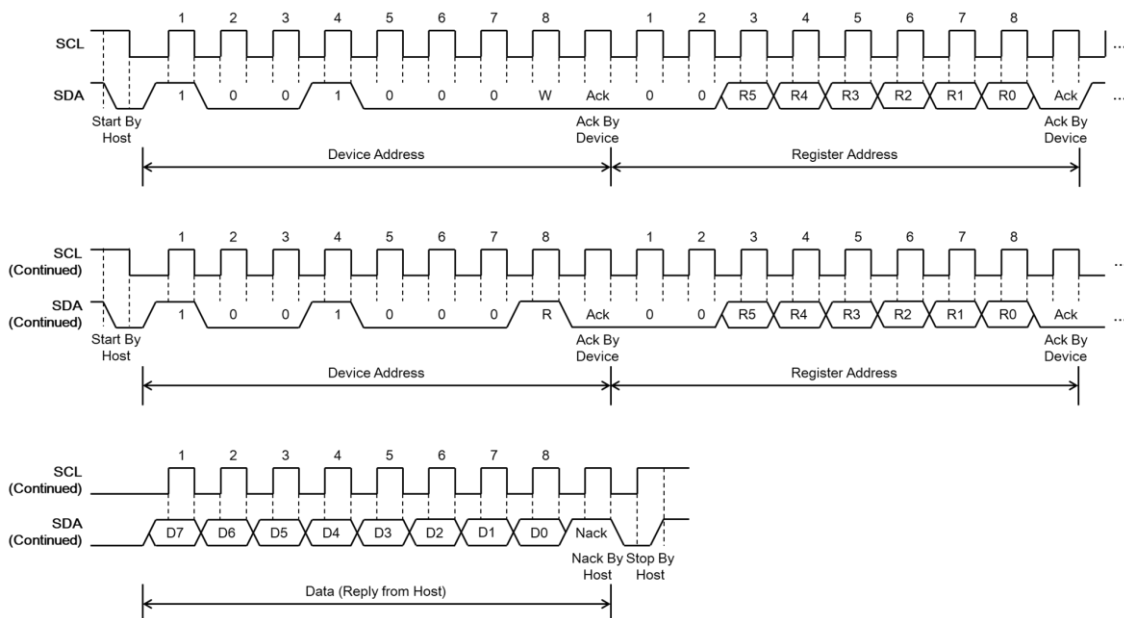


Figure 22 Two-wire timing diagram for Read Single Byte format

## Signal and Reference Multiplexer

### Signal Multiplexer

The AFE6160A is 3-channel data acquisition system suitable for applications requiring high channel density such as industrial process control, portable medical devices and automated test equipment. By multiplexer, multiple sensors signal can be measured with a single sigma-delta ADC, reducing the system cost.

Setting bit ENMUXS to 1 enables the signal multiplexer. There're two signal multiplexers, one for the positive analog input, VINH, and one for the negative analog input, VINL. Channel 0, 1 and 2 represent input of AIN0, AIN1 and AIN2 respectively. Channel 3 is input of internal temperature sensor and channel 4 is power monitor input. Differential input between AIN0+ and AIN1- is configurable by proper setting, however, such configuration isn't recommended.

The AIN2 analog input has multiple functions, 1. signal input channel 2 (AIN2+, AIN2-), 2. reference input channel 1 (RIN1+, RIN1-) and 3. IDAC output. Moreover, the compliance voltage of IDAC can be configured as signal or reference input.

### Reference Multiplexer

The reference voltage can be select from two external reference inputs and two internal reference sources, providing flexibility for data acquisition. For example, an AVDD-excited sensor can be measured ratiometrically, while other sensor can be measured through internal reference voltage – all with a single AFE6160A.

Setting bit ENMUXR to 1 enables the reference multiplexer. There're two reference multiplexers, one for the analog input, VRH, and one for the negative analog input, VRL. Channel 0 (RIN0+, RIN0-) is a dedicated external reference input, while channel 1 (RIN1+, RIN1-) is a multi-function external reference input. Channel 3 and 4 are internal bandgap reference supply  $VREF_{IN1}$  and  $VREF_{IN2}$  respectively. When the internal reference voltage is selected, it is recommended to connect the external reference pins to analog ground to minimize the multiplexer-coupled noise.

A reference buffer (bit VRBUF) is provided to prevent the distortion when a unknow or high impedance external reference input is applied. Enabling the buffer would decrease ENOB by ~0.5 LSB due to buffer-induced noise, moreover, the rail range of reference buffer is limited to AVDD-0.6V to AVSS.

When using the internal reference, enabling reference buffer improves the performance of sigma-delta ADC by filtering high-frequency noise from bandgap voltage. For the external reference, if the output impedance of source input is negligible compared to the input impedance of AFE6160A reference (2M $\Omega$ ), the buffer can be disabled to achieve optimal sigma-delta ADC performance, and the limitation of rail range is from AVDD to AVSS.

**Signal Amplification and DC Offset Adjustment**

**Instrumentation Amplifier**

The 1<sup>st</sup> stage gain amplifier of AFE6160A is a programmable instrumentation amplifier, PGAGN. This function can be enabled by setting bit INBUF to 1 and an unknown or high impedance signal input would not be distorted.

The maximum input voltage ( $V_{AINX}$ ) is  $AVDD-0.6V$  and the common mode voltage of differential input must be greater than  $0.3V$ . The differential signal input can be amplified by the low-noise PGA with eight programmable gain values, x1, x2, x4, x8, x16, x32, x64 and x128. A simplified PGAGN diagram is shown in Figure 23, the amplified signal should remain within the output rail range:  $AVDD-0.1V$  (non-inverting output) and  $AVSS$  (inverting output).

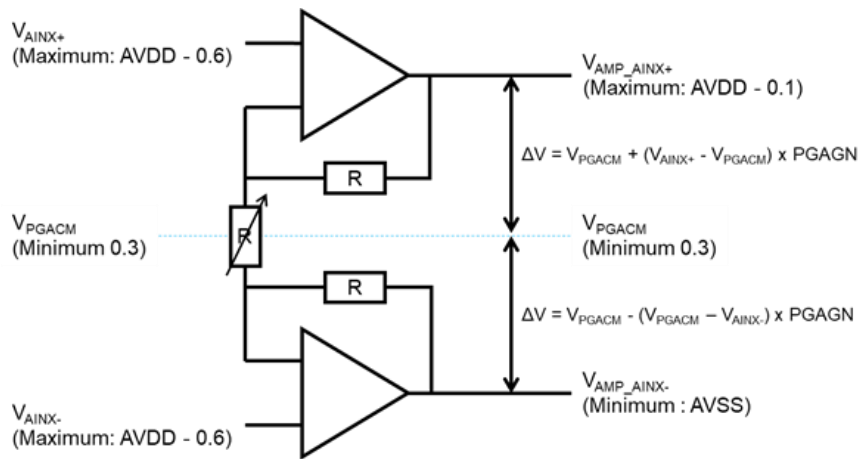


Figure 23 Simplified diagram of instrumentation amplifier, PGAGN.

**Operational Amplifier**

The 2<sup>nd</sup> stage gain amplifier of AFE6160A is a programmable operational amplifier, ADCGN. This amplifier is always enabled and the default gain is x1. Moreover, the differential signal can be enhanced up to x16 with lower power consumption by disable PGA.

The input rail range of ADCGN is from  $AVDD$  to  $AVSS$  and is connected to the output of PGA. The differential signal input can be amplified with sixteen programmable gain values, x1~x16. A simplified ADCGN diagram is shown in Figure 24, the amplified signal should remain within the output rail range:  $AVDD-0.6V$  (non-inverting output) and  $AVSS+0.4V$  (inverting output).

Another programmable operational amplifier, REFGN, is used to effectively amplified the signal by scaling the reference input. The differential reference input can be amplified with four programmable gain values x1, x0.75, x0.5 and x0.25, therefore, the signal can be amplified up to x8192 effectively. However, if required effective gain setting exceeds x1024, an external operation amplifier is recommended to pre-amplify the signal before AFE6160A to achieve optimal performance of sigma-delta ADC.

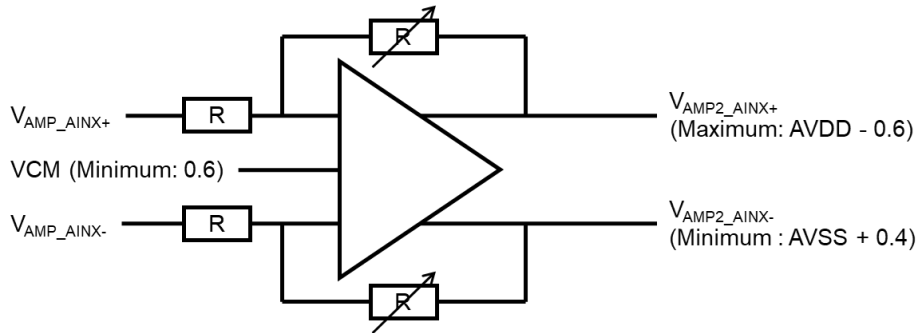


Figure 24 Simplified diagram of operational amplifier, ADCGN.

**DC Offset**

The AFE6160A offers a programmable DC offset voltage to shift differential input to properly level of FSR (Typical 0.8FSR). This function is enabled when the bit DCSET is not 0, Seven offset voltage are available (1/12.5VREF to 7/12.5VERF) and the VREF is determined by reference multiplexer.

Figure 25 shows the simplified diagram of DC offset, the non-inverting input is increased by half of DC offset while inverting input is decreased by half of DC offset. The output rail range is AVDD-0.3V (non-inverting output) to AVSS+0.3V (inverting output), if the DC offset is disabled, the output rail range would be the same as ADCGN.

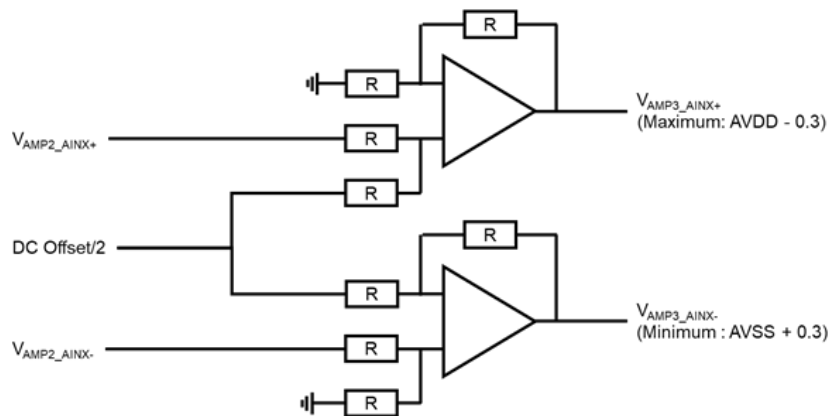


Figure 25 Simplified diagram of DC offset.

**Input Impedance**

The input impedance of AFE6160A has strong dependent on gain setting, as summarized in Table 5. As mentioned before, enabling PGA can significantly increase the input impedance; providing better tolerance to unknow impedance. The input impedance decreases as the PGAGN or ADCGN increases, in particular, the reduction in input impedance can be roughly estimated from the gain setting of ADCGN.

Table 5 Input impedance of different gain setting

| PGAGN | ADCGN | Impedance (MΩ) | PGAGN | ADCGN | Impedance (MΩ) |
|-------|-------|----------------|-------|-------|----------------|
| X     | x1    | 2.72           | x1    | x1    | 1500           |
| X     | x4    | 0.68           | x2    | x1    | 450            |
| X     | x8    | 0.34           | x4    | x1    | 150            |
| X     | x16   | 0.17           | x8    | x1    | 40             |
|       |       |                | x16   | x1    | 15             |
|       |       |                | x32   | x1    | 4              |
|       |       |                | x64   | x1    | 1              |
|       |       |                | x128  | x1    | 0.5            |

**Clock Oscillator**

A well-calibrated ( $\pm 2\%$ ) 1.024MHz internal oscillator, HSRC, serving as the primary clock source of AFE6160A. The clock of sigma-delta ADC is fixed at HSRC/4, and an additional programmable divider (2, 4, 8, 16, 32) is available to further reduce clock of sigma-delta ADC. Usually, for a given ODR, the large Over Sampling Rate (OSR) with a faster clock has better performance than small OSR with slower clock.

**ADC Conversion**

**ADC Output Format**

Since the sigma-delta ADC is an oversampling analog input, the requirement of transition band of anti-aliasing filter is more relax than brick-wall stop band filter in Nyquist-rate data converters. In most applications, a simple single-pole RC filter is sufficient at the input pins, AIN0, AIN1 and AIN2.

The AFE6160A provides a 24-bit, 2's complements digital output. An ideal ADC code for a given differential signal input within the FSR can be calculated by the equation shown in Figure 26. When the input signal is less than or equal to -VERF, the ADC code will be 0x800000H. When the input signal is greater than or equal to +VERF, the ADC code will be 0x000000H rather than 0x7FFFFFFH.

It should be noticed that the ADC code described here and Figure 26 refer to the uncalibrated ADC (DATA\_R) rather than calibrated ADC (DATA). Moreover, an abnormal ADC output might occur when the amplified signal is exceeded the output rail range of PGAGN, ADCGN or DC Offset.

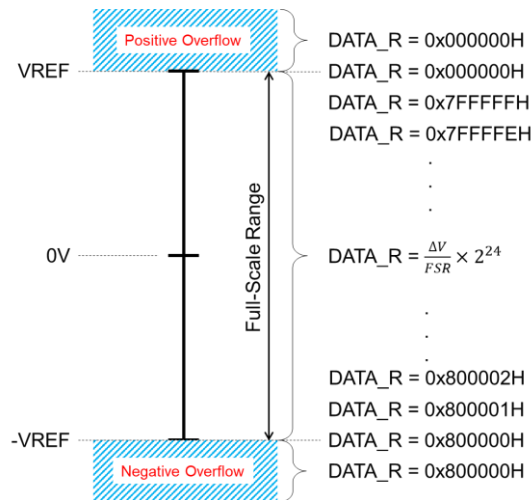


Figure 26 Illustration of ADC output.

**End Of Conversion**

The EOC pin is an open-drain output I/O and requires an external pull-up resistor to read the right status. When an ADC conversion is complete, EOC would be pulled-low by AFE6160A. EOC will remain low level even if after the next conversion is complete, only an “EOC Clear” operation can release low level of EOC.

Several operations automatically perform an “EOC Clear”, such as,

- Disabling or enabling ADC (bit ENADC)
- Change OSR
- Change input or reference channel
- Change size of moving average buffer
- Disabling or enabling sensor fault detection (bit ENBODP, ENBODN)
- Read register “INSTA”

Among this, only reading register “INSTA” clears EOC without re-initializing the sigma-delta ADC (Don’t need the ADC settling time) so, the “EOC Clear” is mainly using this command.

**Output Data Rate**

The AFE6160A supports four Over Sampling Rate (OSR) setting: 128, 256, 512 and 1024. With a 256kHz sigma-delta ADC clock, the ODR can be programmed to 2kHz, 1kHz, 500Hz and 250Hz respectively.

$$Conversion\ Period\ (ms) = \frac{OSR}{Speed\ of\ SDADC}, \quad ODR\ (kHz) = \frac{1}{Conversion\ Period}$$

Due to the nature of sigma-delta ADC, the first conversion after re-configuring the AFE6160A requires longer period compared to subsequent conversions. This additional period is called ADC settling time, the settling time can be estimated by following equation.

$$ADC\ Settling\ Time\ (ms) = \frac{256 + 3 \times OSR}{Speed\ of\ SDADC} + \frac{OSR}{Speed\ of\ SDADC} \times (AVG - 1)$$

The constant 256 represents pre-setting time of AFE6160A. The AFE6160A requires three times the OSR to get the first valid converted result. When a moving-average filter is enabled, the first converted data would be updated (EOC is pulled-low) after the buffer is filled.

### **Moving-Average Filters**

Besides the decimation filter built-in the sigma-delta ADC, the AFE6160A incorporates a moving-average filter to improve the performance without reducing the ODR. Eight moving average buffer sizes are programmable: 1, 2, 4, 8, 16, 32, 64 and 128.

For example, if the ODR is 2kHz, setting size of moving-average buffer to 128 can enhance the performance of sigma-delta ADC (ENOB) by 4bits LSB.

### **Factory Calibration**

During manufacturing, the AFE6160A is factory-calibrated to minimize the offset error and gain error at room temperature. The calibration parameters are stored in One-Time Programmable (OTP) memory, so the re-calibration of AFE6160A is not possible. If a measurement system experiences higher input impedance mismatch or system offset from temperature or environment variations, please contact ESMT if requiring the customized calibration.

## **Operation Mode**

### **Continuous conversion mode**

In continuous conversion mode, the AFE6160A would convert the ADC continuously under proper setting of register file. In this mode, only the first converted ADC requires ADC settling time, the subsequent conversion follow the ODR.

### **One-shot conversion mode**

In One-Shot Conversion Mode (OSM), the AFE6160A stops converting after current ADC conversion is complete. This function can be implemented by setting ENADC to 0 after an EOC interrupt. The next conversion should be triggered by setting the ENADC to 1, each conversion period corresponds to ADC settling time.

### **Standby mode**

The standby mode provides lowest current consumption, in this mode, all the analog circuit blocks including HSRC, sigma-delta ADC, PGA, LDOA, VCM and TSPNS are disabled. In addition, the level of communication pin SDA, SCL and EOC should be held at high. The device can be woken up by writing proper setting of register file via I<sup>2</sup>C.

## **IDAC Excitation Current Sources**

The AFE6160A includes two independent, grounded-available current sources, IDAC1 and IDAC2, to excite an external sensor such as resistive bridge, thermistor and RTD. Each IDAC output can be programmed from 8 $\mu$ A to 1.150mA via the register setting. Each IDAC output can be routed to pin AIN2+ or AIN2-, so the maximum output current at pin AIN2+ or AIN2 is 2.3mA.

The compliance voltage strongly affects IDAC output. Due to the IDACs are driven by AVDD, if the compliance voltage is close to AVDD, the output current decrease significantly. Moreover, if the compliance voltage is less than 1V, the output of IDAC would increase due to the characteristics of MOS. The IDACs are factory-calibrated at 1.6V compliance voltage and it is recommended to operate the IDACs within 1.0V ~ AVDD-0.4V.

## **Sensor Diagnostic**

For harsh application environment, safety is the highest priority and an internal diagnostic becomes important part of the industry requirements. The AFE6160A integrates a DUT open/short diagnostic function without extra components, helping save BOM cost.

### **Open-circuit detection**

The AFE6160A provides a weak burn-out source current from VDD to pin AIN0+, AIN1+ or AIN2+ depending on the setting of signal multiplexer. If the DUT is in an open-circuit condition, the positive node of analog signal is pulled-up to VDD, while the negative node is floating. As the result, ADC output would become larger than normal value or even overflow. By proper setting of register file, the bit SNSH would be set to 1 to indicate sensor open-circuit situation.

### **Short-circuit detection**

The AFE6160A provides a weak burn-out sink current from pin AIN0-, AIN1- or AIN2- to VSS depending on the setting of signal multiplexer. If the DUT is in a short-circuit condition, the voltage difference between positive and negative analog signal input would approach 0, so the ADC output would smaller than normal value. By proper setting of register file, the bit SNSL would be set to 1 to indicate a sensor short-circuit situation.

The diagnostics function make system more robust. The ADC readings of the functional sensor may be affected when the burnout currents sources are enabled. For precision measurement, disable the burn-out current and only enable them while sensor fault condition testing.

## **Local Temperature Sensor**

The AFE6160A integrates an internal temperature sensor for environment conditioning. The temperature sensor consists of multiple on-chip diodes, the difference in current density between diodes generates a voltage that is proportional to absolute temperature (PTAT).

The calibrated temperature data can be readout through register DATA, the format is shown in `temperature_format`. There are 1 sign-bit and 12 temperature bits to represent 1 temperature, the resolution of 1 LSB is 0.0625°C, for example, if the temperature is 25.25°C, the DATA output would be 0x001940H.

For best performance of temperature sensor, the AFE6160A should be configured as the same condition as calibration, i.e., VDD=3.3V, OSR512, INBUF=1, BUFCH=1, VRBUF=1, ADCCH=1, SNSCH=1, PGAGNx1, ADCGNx1 and REFGNx1. Other configuration would cause a larger error in temperature.

### **On-Chip Sensor Switch**

In most of the case, a higher the excitation current on the sensor generates larger the output voltage. However, the high excitation current result in higher power consumption and stronger self-heating effect, that might lead to measurement fault or even permanent damage to sensor. To reduce the self-heating, a common approach is to power the sensor only when ADC conversion period, but not every measurement system can support this flexibility.

The AFE6160A integrates a power-saving switch, PSW, connecting from pin AIN2- to VSS to address a greater flexibility of measurement system. The PSW can be switched on during ADC conversion period while switching off at idle time for power saving. It should be noticed that the voltage variation due to the switch-on resistance (10Ω).

**Layout Note and Grounding Guidelines**

As mention before, the AFE6160A has three power supplies, VDD, AVDD and VCM, power decoupling capacitors are critical for high resolution data conversion. A dual-capacitor consisting of a 2.2 $\mu$ F in parallel with 0.1 $\mu$ F should be placed between VDD-VSS, AVDD-AVSS and VCM-AVSS. In addition, the power trace should be as wider as possible to minimize the path impedance and reduce the voltage drop and glitch.

The communication pin SCL, SDA and EOC are open-drain I/O mode, an external 4.7k $\Omega$  pull-up resistor is recommended.

The differential signal and reference are referenced to its common-mode voltage. A 0.1 $\mu$ F capacitor can be used to filter the high frequency noise of common-mode voltage. Moreover, implementation of an anti-aliasing filter helps suppress the high frequency noise due to the lower sampling rate of sigma-delta ADC.

The analog ground plane should be paved underneath the AFE6160A to prevent coupling of digital signal into device. Routing digital signals under the device or parallel to the sensitive signals should be avoid, because these traces might couple the noise into the device, signal or reference.

The ground and power traces around AFE6160A should be separated to minimize any switching noise. Using large ground planes with multiple vias and ensuring short return path to reduce the ground impedance and minimize the disturbance voltage. In addition, shielding technique should be considered to protect the sensitive analog input and reference input signals from noisy environment. Since digital interface is fast switching signal, ground shielding can prevent the radiating noise. Digital signals should never be touted close to the analog or reference signals. A double-sided PCB with solid ground plane is preferred to achieve the best performance.

The PCB layout must ensure that the return current path are as close as possible to the paths the currents took to reach their destinations.

**Application Information**

**Power Saving and Ratiometric Measurement for Bridge Sensors**

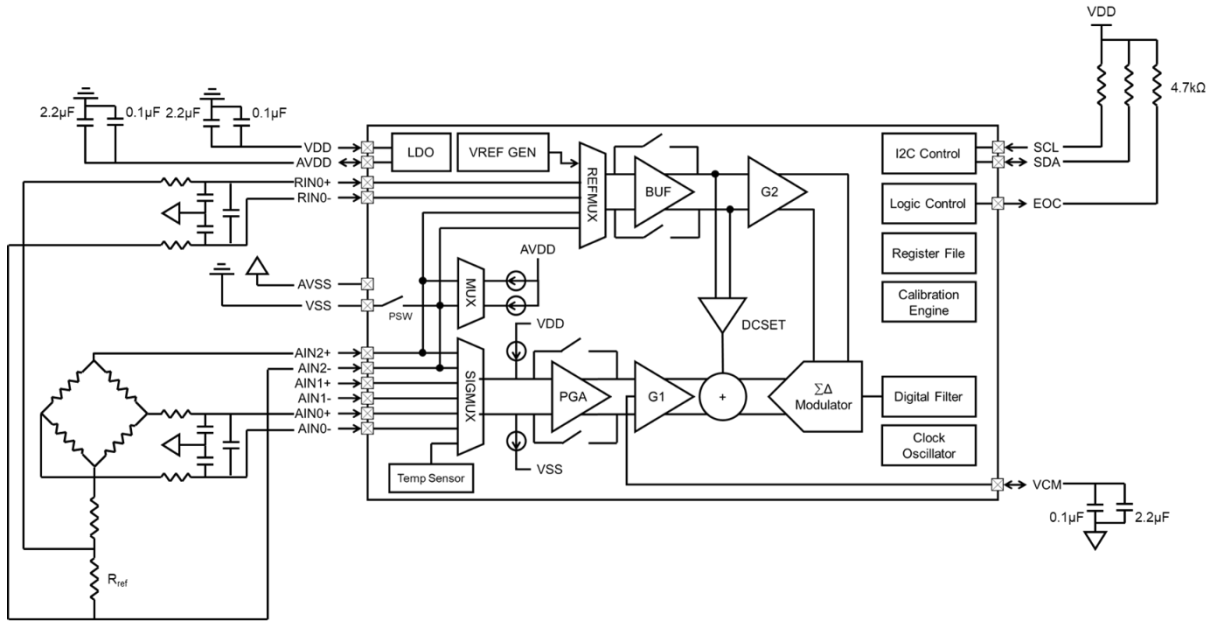


Figure 27 Power Saving and Ratiometric Measurement for Bridge Sensors

**Ratiometric Measurement for IR Thermopile**

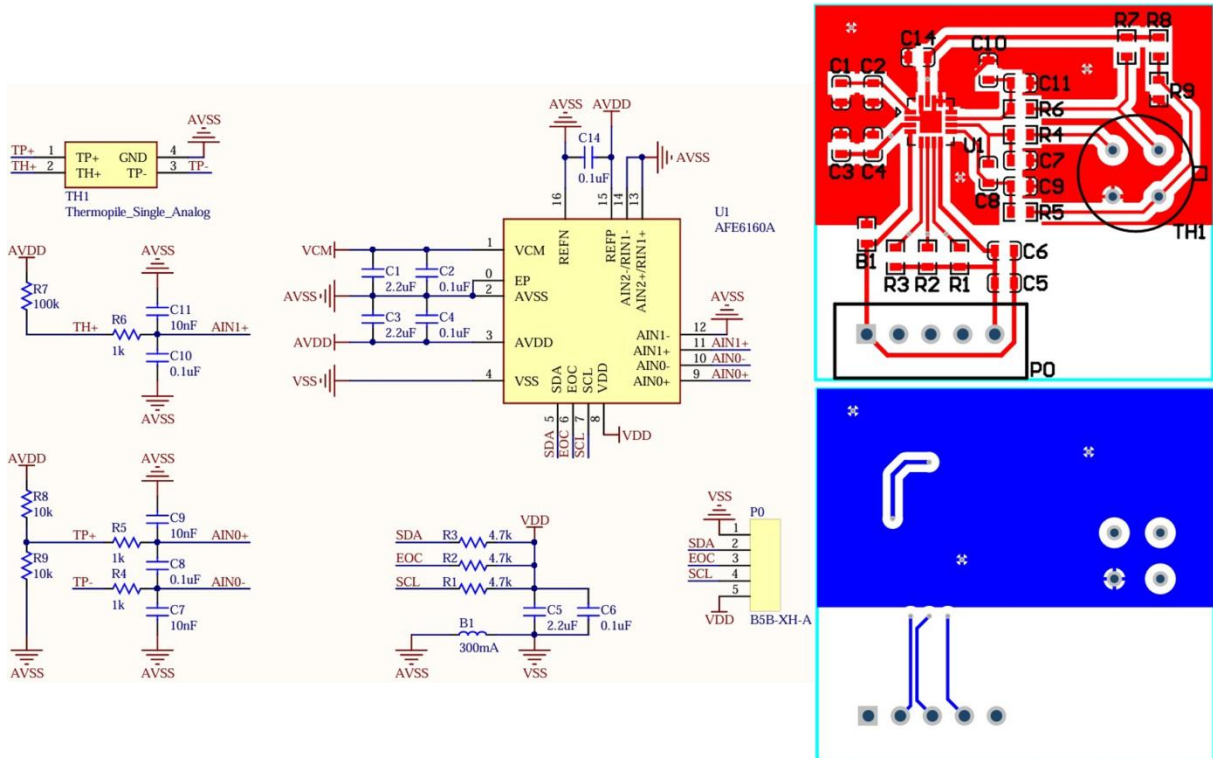


Figure 28 Ratiometric Measurement for IR Thermopile

## Register Summary

| Register | ADD  | R/W | Bit7            | Bit6         | Bit5        | Bit4      | Bit3        | Bit2        | Bit1      | Bit0    | Default |
|----------|------|-----|-----------------|--------------|-------------|-----------|-------------|-------------|-----------|---------|---------|
| DATA_RH  | 0x00 | R   | DATA_R [23:16]  |              |             |           |             |             |           |         | 0x00    |
| DATA_RM  | 0x01 | R   | DATA_R [15:8]   |              |             |           |             |             |           |         | 0x00    |
| DATA_RL  | 0x02 | R   | DATA_R [7:0]    |              |             |           |             |             |           |         | 0x00    |
| DATA_H   | 0x03 | R   | DATA [23:16]    |              |             |           |             |             |           |         | 0x00    |
| DATA_M   | 0x04 | R   | DATA [15:8]     |              |             |           |             |             |           |         | 0x00    |
| DATA_L   | 0x05 | R   | DATA [7:0]      |              |             |           |             |             |           |         | 0x00    |
| OSR      | 0x18 | R/W | -               | -            | -           | OSR [1:0] |             | AVG [2:0]   |           |         | 0x00    |
| ENCFG    | 0x19 | R/W | -               | -            | ENBODN      | ENBODP    | ENPDET      | ENVCM       | ENLDOA    | ENBIAS  | 0x00    |
| SIGMUX   | 0x1A | R/W | -               | -            | -           | -         | -           | INCH1       | INCH0     | -       | 0x00    |
| SIGCFG   | 0x1B | R/W | ENMUXS          | -            | VINL [2:0]  |           |             | VINH [2:0]  |           |         | 0x00    |
| REFCFG   | 0x1C | R/W | ENMUXR          | -            | -           | -         | VRL [1:0]   |             | VRH [1:0] |         | 0x00    |
| IDACCFG  | 0x1D | R/W | -               | -            | PSW         | -         | DAC2N       | DAC1N       | DAC2P     | DAC1P   | 0x00    |
| PGACFG   | 0x1E | R/W | -               | VRBUF        | PGACH       | INBUF     | -           | PGAGN [2:0] |           |         | 0x00    |
| ADCCFG   | 0x1F | R/W | ENADC           | ADCCH        | REFGN [1:0] |           | ADCGN [3:0] |             |           |         | 0x00    |
| DCSET    | 0x20 | R/W | -               | -            | -           | -         | -           | DCSET [2:0] |           |         | 0x00    |
| TSNS     | 0x21 | R/W | -               | -            | -           | -         | -           | -           | SNSCH     | TMPSENS | 0x00    |
| IDAC1    | 0x22 | R/W | ENIDAC1         | IDAC1 [6:0]  |             |           |             |             |           |         | 0x00    |
| IDAC2    | 0x23 | R/W | ENIDAC2         | IDAC2 [6:0]  |             |           |             |             |           |         | 0x00    |
| SYSCCLK  | 0x24 | R/W | -               | CLKDIV [2:0] |             |           | -           | -           | -         | ENHSRC  | 0x01    |
| INSTA    | 0x25 | R/W | INTF            | SNSL         | SNSH        | -         | -           | -           | -         | INTEN   | 0x00    |
| SNSTH_HH | 0x26 | R/W | SNSTH_H [23:16] |              |             |           |             |             |           |         | 0x00    |
| SNSTH_HM | 0x27 | R/W | SNSTH_H [15:8]  |              |             |           |             |             |           |         | 0x00    |
| SNSTH_HL | 0x28 | R/W | SNSTH_H [7:0]   |              |             |           |             |             |           |         | 0x00    |
| SNSTH_LH | 0x29 | R/W | SNSTH_L [23:16] |              |             |           |             |             |           |         | 0x00    |
| SNSTH_LM | 0x2A | R/W | SNSTH_L [15:8]  |              |             |           |             |             |           |         | 0x00    |
| SNSTH_LL | 0x2B | R/W | SNSTH_L [7:0]   |              |             |           |             |             |           |         | 0x00    |

## Register Description

### Raw Data Register

The three registers store 24-bit uncalibrated ADC data.

| Register | ADD  | R/W | Bit7           | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 | Default |
|----------|------|-----|----------------|------|------|------|------|------|------|------|---------|
| DATA_RH  | 0x00 | R   | DATA_R [23:16] |      |      |      |      |      |      |      | 0x00    |
| DATA_RM  | 0x01 | R   | DATA_R [15:8]  |      |      |      |      |      |      |      | 0x00    |
| DATA_RL  | 0x02 | R   | DATA_R [7:0]   |      |      |      |      |      |      |      | 0x00    |

### Data Register

The three registers store 24-bit uncalibrated ADC data.

| Register | ADD  | R/W | Bit7         | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 | Default |
|----------|------|-----|--------------|------|------|------|------|------|------|------|---------|
| DATA_H   | 0x03 | R   | DATA [23:16] |      |      |      |      |      |      |      | 0x00    |
| DATA_M   | 0x04 | R   | DATA [15:8]  |      |      |      |      |      |      |      | 0x00    |
| DATA_L   | 0x05 | R   | DATA [7:0]   |      |      |      |      |      |      |      | 0x00    |

When the signal multiplexer is switched to internal temperature, DATA register shows the calibrated temperature data in following format.

| Register | ADD  | R/W | Bit7        | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 | Default |
|----------|------|-----|-------------|------|------|------|------|------|------|------|---------|
| DATA_H   | 0x03 | R   | -           |      |      |      |      |      |      |      | 0x00    |
| DATA_M   | 0x04 | R   | TEMP [11:4] |      |      |      |      |      |      |      | 0x00    |
| DATA_L   | 0x05 | R   | TEMP [3:0]  |      |      |      | 0    | 0    | 0    | 0    | 0x00    |

| Bits    | Bits Name   | Description                                                                                                                                                                                                                      |
|---------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [23:16] | Reserved    | -                                                                                                                                                                                                                                |
| [15:4]  | TEMP [11:0] | TEMP [11]: Sign bit<br>TEMP [10]: 64°C<br>TEMP [9]: 32°C<br>TEMP [8]: 16°C<br>TEMP [7]: 8°C<br>TEMP [6]: 4°C<br>TEMP [5]: 2°C<br>TEMP [4]: 1°C<br>TEMP [3]: 0.5°C<br>TEMP [2]: 0.25°C<br>TEMP [1]: 0.125°C<br>TEMP [0]: 0.0625°C |
| [3:0]   | Reserved    | Fixed at 0                                                                                                                                                                                                                       |

## Oversampling Rate Register

This register controls the over sampling rate and moving average buffer size

| Register | ADD  | R/W | Bit7 | Bit6 | Bit5 | Bit4      | Bit3 | Bit2      | Bit1 | Bit0 | Default |
|----------|------|-----|------|------|------|-----------|------|-----------|------|------|---------|
| OSR      | 0x18 | R/W | –    | –    | –    | OSR [1:0] |      | AVG [2:0] |      |      | 0x00    |

| Bits  | Bits Name | Description                                                                                                                                                                                                                                                                                                                                               |
|-------|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:6] | Reserved  | –                                                                                                                                                                                                                                                                                                                                                         |
| [4:3] | OSR [1:0] | 00: OSR = 512 (500sps if CLKDIV [6:4] = 000)<br>01: OSR = 256 (1000sps if CLKDIV [6:4] = 000)<br>10: OSR = 128 (2000sps if CLKDIV [6:4] = 000)<br>11: OSR = 1024 (250sps if CLKDIV [6:4] = 000)                                                                                                                                                           |
| [2:0] | AVG [2:0] | 000: Buffer size of moving average is 1<br>001: Buffer size of moving average is 2<br>010: Buffer size of moving average is 4<br>011: Buffer size of moving average is 8<br>100: Buffer size of moving average is 16<br>101: Buffer size of moving average is 32<br>110: Buffer size of moving average is 64<br>111: Buffer size of moving average is 128 |

## ENCFG Register

This register controls the power and sensor diagnostic function.

| Register | ADD  | R/W | Bit7 | Bit6 | Bit5   | Bit4   | Bit3   | Bit2  | Bit1   | Bit0   | Default |
|----------|------|-----|------|------|--------|--------|--------|-------|--------|--------|---------|
| ENCFG    | 0x19 | R/W | –    | –    | ENBODN | ENBODP | ENPDET | ENVCM | ENLDOA | ENBIAS | 0x00    |

| Bits  | Bits Name | Description                                                                         |
|-------|-----------|-------------------------------------------------------------------------------------|
| [7:6] | Reserved  | –                                                                                   |
| [5]   | ENBODN    | 0: Disable burn-out sink current<br>1: Enable burn-out sink current                 |
| [4]   | ENBODP    | 0: Disable burn-out source current<br>1: Enable burn-out source current             |
| [3]   | ENPDET    | 0: Disable power supply monitor<br>1: Enable power supply monitor                   |
| [2]   | ENVCM     | 0: Disable common-mode voltage generator<br>1: Enable common-mode voltage generator |
| [1]   | ENLDOA    | 0: Disable analog voltage regulator<br>1: Enable analog voltage regulator           |
| [0]   | ENBIAS    | 0: Disable bias current<br>1: Enable bias current                                   |

## Input Routing Register

This register controls the input routing.

| Register | ADD  | R/W | Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2  | Bit1  | Bit0 | Default |
|----------|------|-----|------|------|------|------|------|-------|-------|------|---------|
| SIGMUX   | 0x1A | R/W | –    | –    | –    | –    | –    | INCH1 | INCH0 | –    | 0x00    |

| Bits  | Bits Name | Description                                                                                                                                                                                        |
|-------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:3] | Reserved  | –                                                                                                                                                                                                  |
| [2:1] | INCH      | 00 : Differential analog input signals go-through<br>01 : Differential signals connect to positive terminal input<br>10 : Differential signals connect to negative terminal input<br>11 : Reserved |
| [0]   | Reserved  | –                                                                                                                                                                                                  |

## Input Signal Multiplexer Register

This register controls the signal multiplexer.

| Register | ADD  | R/W | Bit7   | Bit6 | Bit5       | Bit4 | Bit3       | Bit2 | Bit1 | Bit0 | Default |
|----------|------|-----|--------|------|------------|------|------------|------|------|------|---------|
| SIGCFG   | 0x1B | R/W | ENMUXS | –    | VINL [2:0] |      | VINH [2:0] |      |      | 0x00 |         |

| Bits  | Bits Name  | Description                                                                                                                                                                                         |
|-------|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7]   | ENMUXS     | 0: Disable signal multiplexer<br>1: Enable signal multiplexer                                                                                                                                       |
| [6]   | Reserved   | –                                                                                                                                                                                                   |
| [5:3] | VINL [2:0] | Negative multiplexer input of differential signal is<br>000: AIN0-<br>001: AIN1-<br>010: AIN2-<br>011: Negative input of internal temperature sensor<br>100: VDD/4 (Power monitor)<br>101~111: AVSS |
| [2:0] | VINH [2:0] | Positive multiplexer input of differential signal is<br>000: AIN0+<br>001: AIN1+<br>010: AIN2+<br>011: Positive input of internal temperature sensor<br>100: VDD/2 (Power monitor)<br>101~111: AVSS |

## Reference Voltage Input Multiplexer Register

This register controls the reference multiplexer.

| Register | ADD  | R/W | Bit7   | Bit6 | Bit5 | Bit4 | Bit3      | Bit2 | Bit1      | Bit0 | Default |
|----------|------|-----|--------|------|------|------|-----------|------|-----------|------|---------|
| REFCFG   | 0x1C | R/W | ENMUXR | –    | –    | –    | VRL [1:0] |      | VRH [1:0] |      | 0x00    |

| Bits  | Bits Name | Description                                                                                                                                                                               |
|-------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7]   | ENMUXR    | 0: Disable reference multiplexer<br>1: Enable reference multiplexer                                                                                                                       |
| [6:4] | Reserved  | –                                                                                                                                                                                         |
| [3:2] | VRL [1:0] | Negative multiplexer input of differential reference is<br>00: RIN0-<br>01: RIN1-<br>10: AVSS (Negative input of REF <sub>IN1</sub> )<br>11: 0.2V (Negative input of REF <sub>IN2</sub> ) |
| [1:0] | VRH [1:0] | Positive multiplexer input of differential reference is<br>00: RIN0+<br>01: RIN1+<br>10: 1.2V (Positive input of REF <sub>IN1</sub> )<br>11: 1.0V (Positive input of REF <sub>IN2</sub> ) |

## IDAC Configuration Register

This register controls the routing of IDAC and power switch.

| Register | ADD  | R/W | Bit7 | Bit6 | Bit5 | Bit4 | Bit3  | Bit2  | Bit1  | Bit0  | Default |
|----------|------|-----|------|------|------|------|-------|-------|-------|-------|---------|
| IDACCFG  | 0x1D | R/W | –    | –    | PSW  | –    | DAC2N | DAC1N | DAC2P | DAC1P | 0x00    |

| Bits  | Bits Name | Description                                                                |
|-------|-----------|----------------------------------------------------------------------------|
| [7:6] | Reserved  | –                                                                          |
| [5]   | PSW       | 0: Disable power saving switch<br>1: Enable power saving switch            |
| [4]   | Reserved  | –                                                                          |
| [3]   | DAC2N     | 0: Output of IDAC2 toward AIN2- is disabled<br>1: Output of IDAC2 is AIN2- |
| [2]   | DAC1N     | 0: Output of IDAC1 toward AIN2- is disabled<br>1: Output of IDAC1 is AIN2- |
| [1]   | DAC2P     | 0: Output of IDAC2 toward AIN2+ is disabled<br>1: Output of IDAC2 is AIN2+ |
| [0]   | DAC1P     | 0: Output of IDAC1 toward AIN2+ is disabled<br>1: Output of IDAC1 is AIN2+ |

## PGACFG Register

This register controls the PGA and the reference buffer.

| Register | ADD  | R/W | Bit7 | Bit6  | Bit5  | Bit4  | Bit3 | Bit2        | Bit1 | Bit0 | Default |
|----------|------|-----|------|-------|-------|-------|------|-------------|------|------|---------|
| PGACFG   | 0x1E | R/W | –    | VRBUF | PGACH | INBUF | –    | PGAGN [2:0] |      |      | 0x00    |

| Bits  | Bits Name   | Description                                                                                                                               |
|-------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| [7]   | Reserved    | –                                                                                                                                         |
| [6]   | VRBUF       | 0: Disable reference buffer<br>1: Enable reference buffer                                                                                 |
| [5]   | PGACH       | 0: Disable PGA chopper<br>1: Enable PGA chopper                                                                                           |
| [4]   | INBUF       | 0: Disable PGA<br>1: Enable PGA                                                                                                           |
| [3]   | Reserved    | –                                                                                                                                         |
| [2:0] | PGAGN [2:0] | 000: PGAGN x1<br>001: PGAGN x2<br>010: PGAGN x4<br>011: PGAGN x8<br>100: PGAGN x16<br>101: PGAGN x32<br>110: PGAGN x64<br>111: PGAGN x128 |

## ADC Configuration Register

This register controls the sigma-delta ADC module and reference gain

| Register | ADD  | R/W | Bit7  | Bit6  | Bit5        | Bit4 | Bit3        | Bit2 | Bit1 | Bit0 | Default |
|----------|------|-----|-------|-------|-------------|------|-------------|------|------|------|---------|
| ADCCFG   | 0x1F | R/W | ENADC | ADCCH | REFGN [1:0] |      | ADCGN [3:0] |      |      | 0x00 |         |

| Bits  | Bits Name   | Description                                                          |
|-------|-------------|----------------------------------------------------------------------|
| [7]   | ENADC       | 0: Disable sigma-delta ADC<br>1: Enable sigma-delta ADC              |
| [6]   | ADCCH       | 0: Disable ADC chopper<br>1: Enable ADC chopper                      |
| [5:4] | REFGN [1:0] | 00: REFGN x1<br>01: REFGN x0.5<br>10: REFGN x0.75<br>11: REFGN x0.25 |
| [3:0] | ADCGN [3:0] | 0000: ADCGN x1<br>0001: ADCGN x2<br>0010: ADCGN x3<br>0011: ADCGN x4 |

|  |  |                                                                                                                                                                                                                             |
|--|--|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  |  | 0100: ADCGN x5<br>0101: ADCGN x6<br>0110: ADCGN x7<br>0111: ADCGN x8<br>1000: ADCGN x9<br>1001: ADCGN x10<br>1010: ADCGN x11<br>1011: ADCGN x12<br>1100: ADCGN x13<br>1101: ADCGN x14<br>1110: ADCGN x15<br>1111: ADCGN x16 |
|--|--|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## DC Offset Register

This register controls the DC offset.

| Register | ADD  | R/W | Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2        | Bit1 | Bit0 | Default |
|----------|------|-----|------|------|------|------|------|-------------|------|------|---------|
| DCSET    | 0x20 | R/W | –    | –    | –    | –    | –    | DCSET [2:0] |      |      | 0x00    |

| Bits  | Bits Name   | Description                                                                                                                                                                                                                                                  |
|-------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:3] | Reserved    | –                                                                                                                                                                                                                                                            |
| [2:0] | DCSET [2:0] | 000: DC Offset is 0/12.5VREF<br>001: DC Offset is 1/12.5VREF<br>010: DC Offset is 2/12.5VREF<br>011: DC Offset is 3/12.5VREF<br>100: DC Offset is 4/12.5VREF<br>101: DC Offset is 5/12.5VREF<br>110: DC Offset is 6/12.5VREF<br>111: DC Offset is 7/12.5VREF |

## Temperature Sensor Register

This register controls the internal temperature sensor

| Register | ADD  | R/W | Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1  | Bit0   | Default |
|----------|------|-----|------|------|------|------|------|------|-------|--------|---------|
| TSNS     | 0x21 | R/W | –    | –    | –    | –    | –    | –    | SNSCH | TMPSNS | 0x00    |

| Bits  | Bits Name | Description                                                                                                                           |
|-------|-----------|---------------------------------------------------------------------------------------------------------------------------------------|
| [7:2] | Reserved  | –                                                                                                                                     |
| [1]   | SNSCH     | 0: Disable chopper of internal temperature sensor<br>1: Enable chopper of internal temperature sensor                                 |
| [0]   | TMPSNS    | 0: Disable internal temperature sensor and sigma-delta ADC module<br>1: Enable internal temperature sensor and sigma-delta ADC module |

## IDAC1 Register

This register controls the output of IDAC1.

| Register | ADD  | R/W | Bit7    | Bit6        | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 | Default |      |
|----------|------|-----|---------|-------------|------|------|------|------|------|------|---------|------|
| IDAC1    | 0x22 | R/W | ENIDAC1 | IDAC1 [6:0] |      |      |      |      |      |      |         | 0x00 |

| Bits  | Bits Name   | Description                                                                                                                                                                           |
|-------|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7]   | ENIDAC1     | 0: Disable IDAC1<br>1: Enable IDAC1                                                                                                                                                   |
| [6:0] | IDAC1 [6:0] | Level of IDAC1 output is<br>0000000: 8μA<br>0000001: 16μA<br>0000010: 25μA<br>0000100: 45μA<br>0001000: 80μA<br>0010000: 150μA<br>0100000: 300μA<br>1000000: 590μA<br>1111111: 1150μA |

## IDAC2 Register

This register controls the output of IDAC2.

| Register | ADD  | R/W | Bit7    | Bit6        | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 | Default |      |
|----------|------|-----|---------|-------------|------|------|------|------|------|------|---------|------|
| IDAC2    | 0x23 | R/W | ENIDAC2 | IDAC2 [6:0] |      |      |      |      |      |      |         | 0x00 |

| Bits  | Bits Name   | Description                                                                                                                                                                           |
|-------|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7]   | ENIDAC2     | 0: Disable IDAC2<br>1: Enable IDAC2                                                                                                                                                   |
| [6:0] | IDAC2 [6:0] | Level of IDAC2 output is<br>0000000: 8μA<br>0000001: 16μA<br>0000010: 25μA<br>0000100: 45μA<br>0001000: 80μA<br>0010000: 150μA<br>0100000: 300μA<br>1000000: 590μA<br>1111111: 1150μA |

## System Clock Register

This register controls the system clock.

| Register | ADD  | R/W | Bit7 | Bit6         | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0   | Default |
|----------|------|-----|------|--------------|------|------|------|------|------|--------|---------|
| SYSCLK   | 0x24 | R/W | –    | CLKDIV [2:0] |      |      | –    | –    | –    | ENHSRC | 0x01    |

| Bits  | Bits Name    | Description                                                                                                                                                                                                                                                                                        |
|-------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7]   | Reserved     | –                                                                                                                                                                                                                                                                                                  |
| [6:4] | CLKDIV [2:0] | The extra clock divider of SDADC is<br>000: 1 (Clock of SDADC is 250kHz)<br>001: 2 (Clock of SDADC is 125kHz)<br>010: 4 (Clock of SDADC is 62.5kHz)<br>011: 8 (Clock of SDADC is 31.25kHz)<br>100: 16 (Clock of SDADC is 15.625kHz)<br>101: 32 (Clock of SDADC is 7.8125kHz)<br>110, 111: Reserved |
| [3:1] | Reserved     | –                                                                                                                                                                                                                                                                                                  |
| [0]   | ENHSRC       | 0: Disable internal high-speed oscillator<br>1: Enable internal high-speed oscillator                                                                                                                                                                                                              |

## Interrupt Status Register

This register indicates the interrupt status.

| Register | ADD  | R/W | Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0  | Default |
|----------|------|-----|------|------|------|------|------|------|------|-------|---------|
| INSTA    | 0x25 | R/W | INTF | SNSL | SNSH | –    | –    | –    | –    | INTEN | 0x00    |

| Bits  | Bits Name | Description                                                                                                                                                  |
|-------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7]   | INTF      | 0: An ADC conversion is in processing<br>1: An ADC conversion is done<br>This flag is set by hardware and cleared by writing “1” through software.           |
| [6]   | SNSL      | 0: The shot-circuit test on external sensor is passed<br>1: The shot-circuit test on external sensor is failed.<br>This flag is set and cleared by hardware. |
| [5]   | SNSH      | 0: The open-circuit test on external sensor is passed<br>1: The open-circuit test on external sensor is failed.<br>This flag is set and cleared by hardware. |
| [4:1] | Reserved  | –                                                                                                                                                            |
| [0]   | INTEN     | 0: Disable interrupt function (EOC, INTF)<br>1: Enable interrupt function (EOC, INTF)                                                                        |

**ADC Threshold Register for Open-Circuit Test**

These three registers are the 24-bit ADC threshold for open-circuit test.


| Register | ADD  | R/W | Description     | Default |
|----------|------|-----|-----------------|---------|
| SNSTH_HH | 0x26 | R/W | SNSTH_H [23:16] | 0x00    |
| SNSTH_HM | 0x27 | R/W | SNSTH_H [15:8]  | 0x00    |
| SNSTH_HL | 0x28 | R/W | SNSTH_H [7:0]   | 0x00    |

**ADC Threshold Register for Short-Circuit Test**

These three registers are the 24-bit ADC threshold for short-circuit test.

| Register | ADD  | R/W | Description     | Default |
|----------|------|-----|-----------------|---------|
| SNSTH_LH | 0x29 | R/W | SNSTH_H [23:16] | 0x00    |
| SNSTH_LM | 0x2A | R/W | SNSTH_H [15:8]  | 0x00    |
| SNSTH_LL | 0x2B | R/W | SNSTH_H [7:0]   | 0x00    |

## Package Outline Dimensions

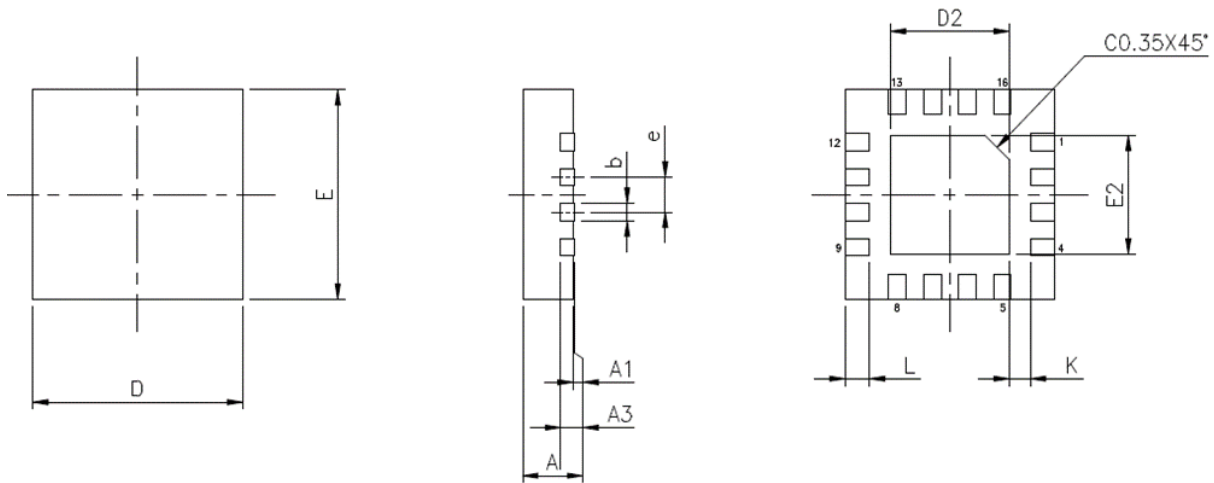

UNIT: mm

| SYMBOLs | Minimum   | Normal | Maximum |
|---------|-----------|--------|---------|
| A       | 0.70      | 0.75   | 0.80    |
| A1      | 0.00      | 0.02   | 0.05    |
| A3      | 0.2 REF.  |        |         |
| b       | 0.18      | 0.25   | 0.30    |
| D       | 2.90      | 3.00   | 3.10    |
| E       | 2.90      | 3.00   | 3.10    |
| e       | 0.50 bsc. |        |         |
| L       | 0.30      | 0.35   | 0.40    |
| K       | 0.20      | –      | –       |
| D2      | 1.60      | 1.70   | 1.80    |
| E2      | 1.60      | 1.70   | 1.80    |

**Reversion History**

| Version | Date       | Description                                                                                                                                                                                                              |
|---------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1.0     | 2025.04.11 | Initial Release                                                                                                                                                                                                          |
| 1.1     | 2025.08.30 | <ul style="list-style-type: none"><li>➤ Add table of content (Page 4)</li><li>➤ Add content of input impedance (Page 25)</li><li>➤ Updated content descriptions</li><li>➤ Rearranged register MAP descriptions</li></ul> |
| 1.2     | 2026.02.03 | <ul style="list-style-type: none"><li>➤ Ordering Information Packing 5K/Reel revision (Page 3)</li><li>➤ IDACx [6:0] = 0001000, min -1.5%, Max +1.5% revision (Page 9)</li></ul>                                         |
| 1.3     | 2026.02.26 | <ul style="list-style-type: none"><li>➤ ESD Human Body Mode AVDD pin fulfills <math>\pm 2000V</math>(Page 5)</li></ul>                                                                                                   |
| 1.4     | 2026.03.12 | <ul style="list-style-type: none"><li>➤ Three address register of ADC Threshold Register for Short-Circuit Test revision.(P.41)</li></ul>                                                                                |

**Important Notice**

All rights reserved.

No part of this document may be reproduced or duplicated in any form or by any means without the prior permission of ESMT.

The contents contained in this document are believed to be accurate at the time of publication. ESMT assumes no responsibility for any error in this document, and reserves the right to change the products or specification in this document without notice.

The information contained herein is presented only as a guide or examples for the application of our products. No responsibility is assumed by ESMT for any infringement of patents, copyrights, or other intellectual property rights of third parties which may result from its use. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of ESMT or others.

Any semiconductor devices may have inherently a certain rate of failure. To minimize risks associated with customer's application, adequate design and operating safeguards against injury, damage, or loss from such failure, should be provided by the customer when making application designs.

ESMT's products are not authorized for use in critical applications such as, but not limited to, life support devices or system, where failure or abnormal operation may directly affect human lives or cause physical injury or property damage. If products described here are to be used for such kinds of application, purchaser must do its own quality assurance testing appropriate to such applications.